



LET'S BUILD A BETTER FUTURE

 **FIRE RATED AND SMOKE
EXHAUST SYSTEMS**

CONTENT

1. Technical requirements to fire-resisting construction in buildings	2
2. Classification of the fire resistance constructions	3
3. Research and Development, Testing, Certification	4
4. Maximum dimensions of a fire-resisting construction fabricated using ALUPROF's systems, types and maximum glass dimensions	6
6. MB-60E EI fire rated doors and partition walls	10
7. MB-78EI fire rated doors and partition walls	14
8. MB-78EI silicone joined fire-rated glazed walls	20
9. MB-78EI DPA automatic fire rated sliding door	26
10. MB-86EI fire rated windows, doors and partitions	28
11. MB-118EI fire rated partition walls	34
12. MB-SR50N EI fire rated curtain walls	38
13. MB-SR50N EI EFEKT fire rated curtain wall	42
14. Fire Resistant Glazed Roofs	44
15. MB-45EW Fire partition walls and door	46
16. GLASSPROF EI fire-resistant glass	50
17. MB-45 smoke-proof door	53
18. Smoke Exhaust Windows and Flaps	55

FIRE-RATED, SMOKE-TIGHT & SMOKE EXHAUST SYSTEMS BY ALUPROF

A wide range of systems offered by Aluprof allows for fabrication of a variety of structural elements that are responsible for "fire protection zones" in buildings, and provide appropriate conditions for evacuation of their occupants. These solutions include products linked to window & door systems, extending to a typical "stick assembly" curtain wall system solution. The fire resistance performance of these solutions, depending on the project requirements, is available in a variety of classes, from EI 15 to EI 120 for vertical assemblies, and achieves a class of REI30 / RE45 for roofs.

Aluprof's products that ensure safety of buildings' users in the event of a fire include internal partition walls with doors MB-45EW (EW30), internal & external partition walls with doors MB-78EI (EI15 to EI90), internal partition walls with doors MB-60E EI (EI15, EI30), automatic

sliding doors MB-78EI DPA (EI15 to EI30), external partition walls, windows and doors MB-86EI (EI30), fire-rated walls MB-118EI (EI120), fire-rated facades MB-SR50N EI (EI30, EI60) and MB-SR50N EI EFEKT (EI30, EI60), glazed fire roofs (RE20, RE30, REI20, REI30), smoke control doors MB-45D (Sa, S200 [Sm]) and smoke exhaust windows & vents.

An important feature of the ALUPROF fire-rated solutions is their ability to interface with each other, one system to the next, whilst maintaining the necessary fire resistance. This is demonstrated with the integration of the MB-78EI door into a facade, enabling the whole structure to achieve a EI 30 or EI 60 class performance.

All products featured in this publication have been successfully tested in laboratories & research institutes in Europe.



Gain valuable time!

TECHNICAL REQUIREMENTS AS TO FIRE-RESISTING CONSTRUCTIONS IN BUILDINGS.

In accordance with the requirements of the building regulations as to buildings and their location, fire-resisting door and windows that are to be installed in the openings of vertical separating elements in a building should be designed and constructed in such a way, that in case of fire:

- prevent fire from spreading
- limit the spread of fire and smoke in the building to other rooms and zones,
- limit the spread of fire to other buildings,
- allow the evacuation of building occupants by limiting the level of heat radiation,
- ensure safety and facilitate the operation of emergency crews

The required fire resistance rating for partitions is determined by the provisions in force in the respective countries, and can be dependent on the fire resistance class, to which the building is suited.



Gain valuable time!

CLASSIFICATION OF FIRE RESISTANCE CONSTRUCTIONS.

E – INTEGRITY

- no flames
- no smoke
- high temperature

Integrity (E) is the ability of a component or construction to maintain the integrity of the element on one side only, without spreading the fire to a non-heated side as a result of penetration of flames or hot gases.



EW – INTEGRITY AND RADIATION REDUCTION

- no flames
- no smoke
- lower thermal radiation

Reduction of radiation (W) is the ability of a component or construction to maintain the integrity of the element on one side only, to reduce the likelihood of fire spreading that may result from significant thermal radiation or through an element, or from its non-heated surface to adjacent materials.



EI – INTEGRITY AND INSULATION

- no flames
- no smoke
- high temperature insulation

Insulation (I) is the ability of a component or construction to maintain the integrity of the element on one side only, without spreading the fire as a result of a significant heat flow from a heated side to a non-heated side. During the fire, the construction on the non-heated side reaches a temperature of not more than +140°C up to +180 °C.



All the above-mentioned parameters are given in minutes. The number after a given symbol gives the laboratory time from starting of a fire, in which a parameter is maintained.

Research and Development, Testing, Certification

Aluprof S.A. strives to continuously improve the quality of its products. The company's quality management system meets the requirements of standards EN ISO 9001 / EN ISO 14001, which has been confirmed by the inspection body TÜV NORD. The products offered by Aluprof meet all the requirements of the European standards as to the quality of alloys, tolerance and resistance characteristics. The company cooperates with many European research centres and building research laboratories, also specializing in the fire-resisting constructions: Building Research Institute (Poland), IFT Rosenheim (Germany), Warrington Certificate Exova (Great Britain), UBAtc (Belgium), Fires Institute (Slovakia), ÉMI Institute (Hungary) Incerc Institute (Romania), Efectis Institute (Netherlands), and others. The cooperation involves fire testing and reviews of the company's documents (reports and classifications). These documents enable ALUPROF systems-based products to be applied in fire-resisting constructions throughout Europe and beyond.





Examples of documents issued for ALUPROF systems-based fire-resisting constructions

ITB
Instytut Techniki Budowlanej
Research and development work, Accredited Group of Laboratories
Notified Body N° 1481 (2014), member: Certified Management System ISO 9001, ISO 27001

EXTENDED APPLICATION REPORT FOR FIRE RESISTANCE

Order No: 1036/2016RZNPZP

Owner of this report: ALUPROF S.A.
153, Warszawa 153,
43-300 Bielsko-Biala
Poland

Prepared by: Fire Research Department
Building Research Institute
21, Koszarowa St.
PL 02-486 Warsaw

Name of product: Aluminum framed, glazed doors of ALUPROF MB 780 E30 system

Report No: 01036.1036RZNPZENG

Issue number: 1

Date of issue: 2020.03.30

This extended application report concerns test results obtained in accordance with Test Method EN 1634-1:2016+A1:2018. Fire resistance and smoke control tests for door and shutter assemblies, operable windows and elements of building hardware. Part 1: Fire resistance test for door and shutter assemblies and operable windows.

The extended application process is carried out in conformity with the following extended application document:

EN 1629-2:2014+A1:2018. Extended application of test results for fire resistance and/or smoke control for door, shutter and operable window assemblies, including their elements of building hardware – Part 2: Fire resistance of integral and parallel metal frame glazed doors and operable windows.

ITB
Instytut Techniki Budowlanej
Research and development work, Accredited Group of Laboratories
Notified Body N° 1481 (2014), member: Certified Management System ISO 9001, ISO 27001

EXTENDED APPLICATION REPORT FOR FIRE RESISTANCE

Order No: 1036/2016RZNPZP

Owner of this report: ALUPROF S.A.
153, Warszawa 153,
43-300 Bielsko-Biala
Poland

Prepared by: Fire Research Department
Building Research Institute
21, Koszarowa St.
PL 02-486 Warsaw

Name of product: Aluminum framed doors of ALUPROF MB 780 E30 system

Report No: 1036.1036RZNPZENG

Issue number: 1

Date of issue: 2020.03.30

This extended application report concerns test results obtained in accordance with Test Method EN 1634-1:2016+A1:2018. Fire resistance and smoke control tests for door and shutter assemblies, operable windows and elements of building hardware. Part 1: Fire resistance test for door and shutter assemblies and operable windows.

The extended application process is carried out in conformity with the following extended application document:

EN 1629-2:2014+A1:2018. Extended application of test results for fire resistance and/or smoke control for door, shutter and operable window assemblies, including their elements of building hardware – Part 2: Fire resistance of integral and parallel metal frame glazed doors and operable windows.

ITB
Instytut Techniki Budowlanej
Research and development work, Accredited Group of Laboratories
Notified Body N° 1481 (2014), member: Certified Management System ISO 9001, ISO 27001

CLASSIFICATION OF FIRE RESISTANCE IN ACCORDANCE WITH EN 13501-2:2016

Order No: 1036/2016RZNPZP

Owner of this report: ALUPROF S.A.
153, Warszawa 153,
43-300 Bielsko-Biala
Poland

Prepared by: Fire Research Department
Building Research Institute
21, Koszarowa St.
PL 02-486 Warsaw

Name of product: Aluminum, profiled doors of ALUPROF MB 800 E30 system

Classification Report No.: 1036/2016RZNPZENG

Issue number: 1

Date of issue: 2020.05.24

This classification report consists of 16 pages and may only be used or reproduced in its entirety.

ITB
Instytut Techniki Budowlanej
Research and development work, Accredited Group of Laboratories
Notified Body N° 1481 (2014), member: Certified Management System ISO 9001, ISO 27001

Warsaw, 2017-04-05

ALUPROF S.A.
ul. Warszawska 153
43-300 Bielsko-Biala

Work No 1036.1316/2016RZNPZP

Classification of fire resistance of Aluprof S.A. curtain walls in full configuration and panel walls of Aluprof MB-SR50 EI ERSK and Aluprof MB-SR50 EI ERSK systems

1. Formal bases
1.1 Order of Aluprof S.A.
1.2 Annex to Statement agreement No 0136/14/2016RZNPZP

2. Technical bases
2.1 Codes
2.1.1. PN-EN 13501-2:2016-07 Klasyfikacja ogniochrony wyrobów budowlanych i elementów budowlanych – Część 2. Klasyfikacja na podstawie badań odpowiednich ogniochrony i wyłączenia dymu (wykazany)

ITB
Instytut Techniki Budowlanej
Research and development work, Accredited Group of Laboratories
Notified Body N° 1481 (2014), member: Certified Management System ISO 9001, ISO 27001

European Technical Assessment **ETA-21/0516 of 30/06/2021**

General Part
Technical Assessment Body issuing the European Technical Assessment: Instytut Techniki Budowlanej

Trade name of the construction product: ALUPROF MB 780E

Product family to which the construction product belongs: Integral Partition K3 for use as non-load bearing walls

Manufacturer: ALUPROF S.A.
ul. Warszawska 153
43-300 Bielsko-Biala, Poland

Manufacturing plant: ALUPROF S.A.
ul. Warszawska 153
43-300 Bielsko-Biala, Poland

This European Technical Assessment contains:
This European Technical Assessment is issued in accordance with regulation (EU) No 305/2011, on the basis of:
European Assessment Document EAD 17000-02-0001 Integral partition K3 for use as non-load-bearing walls

certifire
CERTIFICATE OF APPROVAL
No CF 5138

100 General Management System Products
The certificate is issued on behalf of CERTIFIRE

ALUPROF S.A.
ul. Warszawska 153,
43-300 Bielsko-Biala, Poland
Tel: +48 33 891 83 00

CERTIFIED PRODUCT
Aluminum Framing Systems
Type MB 78 EI for Glazed Walls and Doors

TECHNICAL SCHEDULE
T525 Fire Resistant Glass, Glazing Systems and Materials

Issue: 4th April 2013
Valid to: 3rd April 2018

efectis
Via Bonaria 4
00197 Roma, Italy
Tel: +39 06 512 91 11
Fax: +39 06 512 91 12

PROCES-VERBAL

PROCES-VERBAL DE CLASAMENT A EPR-16-00117

Nuclerul de Referință în Construcții este în VIGILANȚĂ în data 2011 în conformitate cu Decizia 2008 de acreditare în România

Obiectul prezentei verificări de documente și de instalare exterioare este valabilă din data 08.04.2021.

Aprobarea de autorizare de referință: EPR-16-00117 A

Compozant: Unu din cele două sisteme de acoperire exterioră

Responsabil: Ing. Florin ALUPROF S.A.
Ing. Florin ALUPROF S.A.
Ing. Florin ALUPROF S.A.

Documente: PROCEVERBAL 1310 ALUPROF S.A.
PROCEVERBAL 1310 ALUPROF S.A.
PROCEVERBAL 1310 ALUPROF S.A.

IBS Institut für Brandschutztechnik und Sachverständigenberatung

NATIONALER ANHANG FÜR ÖSTERREICH
BEWERTUNG FÜR DIE VERWENDBARKEIT

Verwendbarkeitsniveau Nr.: VWN-31612105-A-Rev3
datengültige Klassifizierung Nr.: 31612105-A-Rev3 vom 01.10.2020

Auftraggeber: Aluprof S.A.
Produktlinie: Dreiflügelige
Systembezeichnung: MB-78EI E30⁺ ein- und zweiflügelige Türen (E3, 30-C)
Ausgabedatum VWN: 02.11.2020
Datum Erstattungsprotokoll: 12.09.2017

A. Allgemeines
Dieser nationale Anhang für Österreich ist nur zusammen mit dem Hauptteil dieses Dokumentes, Alternativanhangsbericht Nr. 31612105-A-Rev3, Seite 1 bis Seite 26, für das System MB-78EI E30⁺ ein- und zweiflügelige Türen verwendbar.

Zusätzliche Prüf- und Klassifizierungsniveaus:
ONORM B 3850 2006-01-01 zusammenfassend
Brandabschütze und -store, Ein- und zweiflügelige Dreiflügel-Türen und -store
ONORM B 3850 2014-04-01
Dreiflügel-Türen und -store sowie Pendeltüren, Antriebsrollen und Prüfungen für ein- und zweiflügelige Elemente
ONORM B 3850 2014-04-01 zusammenfassend
Rauchschutztüren und -store, Ein- und zweiflügelige Dreiflügel-Türen
ONORM B 3850 2014-07-15
Rauchschutztüren und -store, Pendeltüren und -store, Antriebsrollen und Prüfungen für ein- und zweiflügelige Elemente

UBATC
Unité de Certification Technique des Constructeurs belges
Membre de l'UBATC de Belgique
Unité de Certification Technique des Constructeurs belges

Attestation Technique ATG avec Certification
ATG 303P

Système de portes et de fenêtres à cadre aluminium à couple horizontal et à ouverture latérale
Aluprof MB 780 E30


Valable du 03/05/2016 au 02/05/2021

1. Objet et portée de l'attestation Technique
L'objet de l'attestation technique est le système de portes et de fenêtres à cadre aluminium à couple horizontal et à ouverture latérale, modèle MB 780 E30, produit par ALUPROF S.A. Le système est conforme aux exigences de la norme EN 1634-1:2016+A1:2018 et de la norme EN 1629-2:2014+A1:2018.


La portée de l'attestation technique est limitée aux portes et fenêtres à cadre aluminium à couple horizontal et à ouverture latérale, modèle MB 780 E30, produit par ALUPROF S.A. Le système est conforme aux exigences de la norme EN 1634-1:2016+A1:2018 et de la norme EN 1629-2:2014+A1:2018.

Maximum dimensions of a fire-resisting construction fabricated using ALUPROF's systems, types and maximum glass dimensions




The following table lists the maximum dimensions of fire-resisting constructions with notations and maximum glass dimensions depending on the type of construction and its fire resistance rating. For notations/dimensions of glass that are not listed in the table, please contact our Technical Support Department.

Construction	System	Class	Glass manufacturer	Type of glass	Thickness [mm]	Max dims. of the construction/leaf -W x H	Max dims. of the glass/vertical rectangle [mm]	Max dims. of the glass horizontal rectangle [mm]																								
 <p>Fixed partitions</p>	MB-60E EI	EI30	POLFLAM	POLFLAM EI30	20		1500 x 3000	-																								
			AGC	Pyrobel 16	17			1500 x 3000	-																							
			Vetrotech Saint - Cobain	Contraflam 30	16		no limit x 4000	1500 x 3000	-																							
			Glassprof	Glassprof EI30	15			1500 x 3000	-																							
			POLFLAM	POLFLAM EI30	20			1650 x 3300	2548 x 1615																							
			Vetrotech Saint - Cobain	Contraflam 30	22		no limit x 4800	2200 x 4200	-																							
	MB-78 EI	EI30	Pyroguard	Pyroguard T-EI30/18-2	18		1800 x 3600	3000 x 1800																								
			Glassprof	Glassprof EI30	15		1470 x 2800	-																								
			Glassprof	Glassprof EI30 DGU	27 - 49		no limit x 4800	1650 x 3300	-																							
			Glassprof	Glassprof EI30 TGU	37 - 64			1650 x 3300	-																							
			POLFLAM	POLFLAM EI60	25			1500 x 3000	2856 x 1436																							
			Pyroguard	Pyroguard T-EI60/25-3	41-64 27			1500 x 3000	-																							
MB-118EI MB-86EI	EI60	EI60	AGC	Pyrobel 25	27		1617 x 3080	-																								
			Vetrotech Saint - Cobain	Contraflam 60-3	27		1443 x 2420	2500 x 1500																								
			Glassprof	Glassprof EI60	25		1400 x 3000	1500 x 1500																								
			Glassprof	Glassprof EI60 DGU	37 - 59		no limit x 5160	1650 x 3300	-																							
			Glassprof	Glassprof EI60 TGU	49 - 64			1650 x 3300	-																							
			POLFLAM	POLFLAM EI90	32		no limit x 4000	1500 x 3000	-																							
	MB-118EI MB-86EI	EI30	EI30	Glassprof	Glassprof EI90	35		1500 x 3000	-																							
				POLFLAM	POLFLAM EI120	35		1650 x 3300	-																							
				Pilkington	Pyrostop 120-10	58		no limit x 4000	1400 x 2500	-																						
				POLFLAM	POLFLAM EI30	42-64		no limit x 4000	1500 x 3000	-																						
				Vetrotech Saint - Cobain	Contraflam Structure	23		no limit x 3700	1800 x 3600	-																						
				AGC	Pyrobel 16 VL	17		no limit x 3000	1000 x 2900	-																						
MB-78EI	EI60	EI60	POLFLAM	POLFLAM BR	30		1800 x 3600	-																								
			Vetrotech Saint - Cobain	Contraflam Structure	31		no limit x 3700	1650 x 3300	-																							
			AGC	Pyrobel 25 VL	26		no limit x 3000	1000 x 2900	-																							
			POLFLAM	POLFLAM BR	35		no limit x 3700	1800 x 3600	-																							
			Silicone joined glazed walls	MB-78EI	EI60	PILKINGTON	Pyrostop 120-10	58	no limit x 4000	1400 x 2500	-																					
												Vetrotech Saint - Cobain	Contraflam Structure	31	no limit x 3400	1650 x 3300	-															
AGC	Pyrobel 25 VL	26																no limit x 3000	1000 x 2900	-												
																					PILKINGTON	Pyrostop 120-10	58	no limit x 4000	1400 x 2500	-						
																											Vetrotech Saint - Cobain	Contraflam Structure	31	no limit x 3400	1650 x 3300	-

Aluprof is constantly extending its testing and classifications for approved glazing. Kindly contact your local Aluprof representative to receive the latest actual information.

Construction	System	Class	Class manufacturer	Type of glass	Thickness [mm]	Max dims. of the construction /leaf -W x H	Max dims. of the glassvertical rectangle [mm]	Max dims. of the glass horizontal rectangle [mm]					
 doors and windows	MB-60E EI	EI30	POLFLAM	POLFLAM EI30	20	2644 x 2475	1158 x 2333	2750 x 1000					
			AGC	Pyrobel 16	17,3		1160 x 2160						
			Vetrotech Saint - Gobain	Contraflam 30	16		1158 x 2173						
			Glassprof	Glassprof EI30	15		1342 x 2370						
			POLFLAM	POLFLAM EI30	20		2678 x 2886						
					33		2678 x 2886						
					46		1258 x 2358						
					17		1260 x 2360						
					53		1258 x 2358						
					AGC		Pyrobel 16		17	1512 x 2832			
	MB-78E EI	EI30	Vetrotech Saint - Gobain	Contraflam 30	16	2984 x 3006	1118 x 2358	2678 x 1000					
			Promat	Promaglass 30/17	17		1260 x 2360						
			Pilkington	Pyrostop 30	32		1258 x 2358						
			Glassprof	Glassprof EI30	15		1260 x 2348						
					27-49		1258 x 2358						
					39-64		1258 x 2358						
					25		1210 x 2866						
			MB-86E EI	EI60	POLFLAM		POLFLAM EI60		28	2500 x 3006	962 x 2866	2678 x 1000	
									41		870 x 2358		
									55		1358 x 2358		
26,6	1260 x 2360												
62	1258 x 2358												
AGC	Pyrobel 25	25				1260 x 2360							
		27				1258 x 2358							
		25				1230 x 2360							
		38				1258 x 2358							
MB-86E EI	EI60	Vetrotech Saint - Gobain				Contraflam 60		25	2984 x 3006		1260 x 2348		2678 x 1000
			27	1108 x 2358									
			38	1118 x 2358									
			25	1258 x 2358									
			40	1258 x 2358									
			Glassprof	Glassprof EI60	25		1258 x 2358						
					37-59		1258 x 2358						
					49-64		1258 x 2358						
					32		1262 x 2360						
			MB-86E EI	EI90	POLFLAM		POLFLAM EI90	32		2784 x 2500	1262 x 2360	2472 x 800	
40	1262 x 2360												
37	1260 x 2360												
35	12620x 2360												
47-64	1138 x 2338												
MB-86E EI	EI30	POLFLAM				POLFLAM EI30		41-64	3256 x 2550		1385 x 2185		2336 x 1136
								41-64			1385 x 2185		

Aluprof is constantly extending its testing and classifications for approved glazing. Kindly contact your local Aluprof representative to receive the latest actual information.

Construction	System	Class	Glass manufacturer	Type of glass	Thickness [mm]	Max dims. of the construction /leaf - W x H	Max dims. of the glassvertical rectangle [mm]	Max dims. of the glass horizontal rectangle [mm]	
	MB-78EI	E130	POLFLAM	POLFLAM EI30	20	3000 x 2550	1392 x 2364		
			Vetrotech Saint - Gobain	Contraflam 30	16		1015 x 2318		
			POLFLAM	POLFLAM EI30	20	1500 x 2550	1392 x 2364		
			Vetrotech Saint - Gobain	Contraflam 30	16		1015 x 2318		
	E130		POLFLAM	POLFLAM EI30	20-64		1500 x 3000		
			Vetrotech Saint - Gobain	Contraflam 30	16-64		1500 x 3000		
	MB-SR50N EI			Pilkington	Pyrostop 30	16-64		1400 x 2400	
				POLFLAM	POLFLAM EI60	25-64		1500 x 3000	
			E160	Vetrotech Saint - Gobain	Contraflam 60	25-64		1500 x 3000	
				Pilkington	Pyrostop 60	23-64		1400 x 2400	
		E130		POLFLAM	POLFLAM EI30	20-64		1500 x 3000	
				Vetrotech Saint - Gobain	Contraflam 30	16-64		1500 x 3000	
			E160	POLFLAM	POLFLAM EI60	25-64		1500 x 3000	
				Vetrotech Saint - Gobain	Contraflam 60	25-64		1500 x 3000	
	MB-SR50N EI Effekt		POLFLAM	POLFLAM H EI30	40		1250 x 2350		
			Vetrotech Saint - Gobain	Contraflam Lite 30 Horizontal	54		1200 x 2200		
	MB-SR50N EI	RE130/RE30		Vetrotech Saint - Gobain	Contraflam Lite 30 Horizontal	42		1100 x 2100	

Aluprof is constantly extending its testing and classifications for approved glazing. Kindly contact your local Aluprof representative to receive the latest actual information.

GLAZED PARTITION SYSTEMS:

- silicone joined glazed walls **MB-78EI** rated **EI30** & **EI60**
- architecturally-striking shopfronts and high-quality moveable & folding doors **MB-EXPO** i **MB-EXPO MOBILE**
- office partitions with transparent door **MB-45 OFFICE**
- double glazed office partitions **MB-80 OFFICE**



MODERN OFFICE SOLUTIONS AT YOUR FINGERTIPS

ALUPROF
ALUMINIUM SYSTEMS

FIRE RATED PARTITIONS WITH DOORS

MB-60E EI



MB-60E EI enables the fabrication of fire-resisting internal or exterior single or double leaf doors. It also enables the fabrication of “technical windows” and fire-resisting partitions. MB-60E EI-based constructions are classified EI15 or EI30 to EN 13501-2+A1, doors can additionally meet smoke-tightness requirements in class S200, Sa to EN 13501-2 + A1.

This solution is based on aluminium profiles with thermal break (system MB-60E) with the structural depth of profiles of 60 mm. The fire resistance of the construction is ensured by its fire insulation components that are mounted in internal chambers of its profiles. In addition, constructions are equipped with intumescent tapes, which stop the fire from spreading.

The system enables the application of all common fire-resisting glass classified EI15 and EI30 (thickness from 8 to 20 mm). Unlike other fire-resisting systems, MB-60 E EI glass is fastened on the inner face using glazing strips. Special steel elements are an important element in securing the glass before falling out during the fire.



MB-60E EI enables the fabrication of doors of the following max. leaf dimensions: W up to 1.4 m, H up to 2.475 m. Double leaf door can be 2.58 m wide. Design capabilities and compatibility with other MB systems makes this solution a very attractive proposition in that class of products, whilst providing an excellent fire protection.

EI 15

EI 30







Max. dims. of the construction

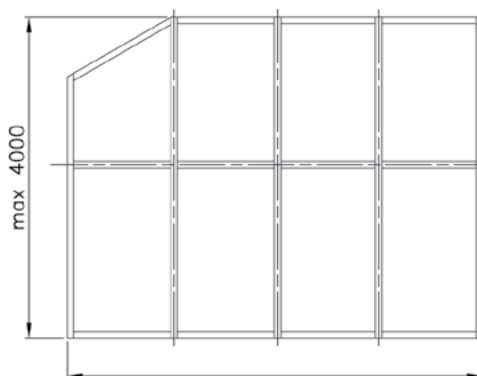


Doors

Technical window



TECHNICAL INFORMATION		TECHNICAL PARAMETERS	
Depth of the partition frame & door	60 mm	Fire resistance rating	EI15, EI30, EN 13501-2 +A1
Depth of the door leaf	60 mm		
Range of glazing	8 - 20 mm		

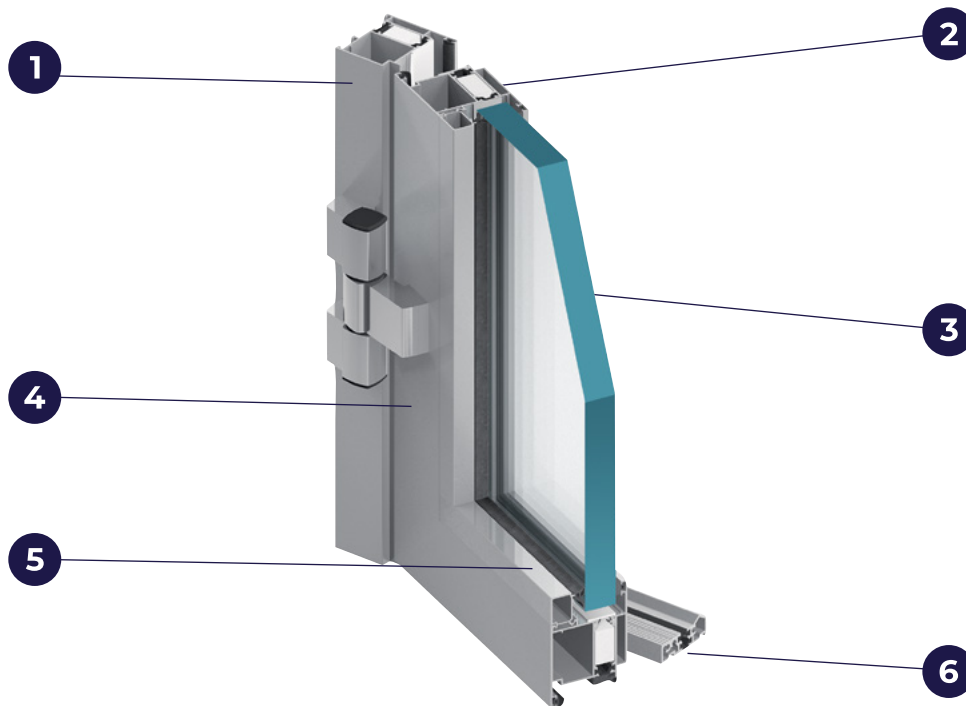

- 1 MB-60E-based fire system enables the use of common elements and allows a simple and fast prefabrication
- 2 Constructions classified EI15, EI30
- 3 The system enables the application of all common fire-resisting glass of different classes and of a thickness ranging from 5 to 41 mm.
- 4 Structural depth of profiles: 60 mm
- 5 Glazing strips used for glazing on the inner face
- 6 Available solutions with or without threshold

Instytut Techniki Budowlanej
PL 02-611 91402491A
ul. Piłsudskiego 5
tel. [+48 22] 825-54-71
fax. [+48 22] 825-76-65
www.itb.pl

Designated according to Article 28 of Regulation (EU) No 305/2011 and number of 01/14 European Organization for Technical Assessment

Member of EOTA
www.eota.eu

European Technical Assessment **ETA-18/0914**
of 17/12/2018

General Part	
Technical Assessment Body issuing the European Technical Assessment	Instytut Techniki Budowlanej
Trade name of the construction product	ALUPROF MB-60E EI
Product family to which the construction product belongs	Internal Partition Kit for use as non-load bearing walls
Manufacturer	ALUPROF S.A. ul. Warszawska 153 43-300 Bielsko-Biala, Poland
Manufacturing plant	ALUPROF S.A. ul. Warszawska 153 43-300 Bielsko-Biala, Poland
This European Technical Assessment contains	22 pages including 3 Annexes which form an integral part of this Assessment
This European Technical Assessment is issued in accordance with regulation (EU) No 305/2011, on the basis of	Guideline for European Technical Approval ETAG 003, edition December 1998 amended April 2012 "Internal partition kits for use as non-loadbearing walls" used as European Assessment Document (EAD)

Instytut Techniki Budowlanej
Research and development works | Accredited Group of Laboratories |
Notified Body N° 1488 | EOTA member | Certified management systems ISO 9001, ISO 17001

EXTENDED APPLICATION REPORT FOR FIRE RESISTANCE

Order No:	8163620/R492NZP
Owner of this report:	ALUPROF S.A. 153, Warszawska St. PL 43-300 Bielsko-Biala
Prepared by:	Fire Research Department Building Research Institute 21, Koszarow St. PL 02-656 Warsaw
Name of product:	Aluminum framed, glazed, hinged doors of ALUPROF MB-60E EI system
Report No:	01636.120/R492NZPENG
Issue number:	1
Date of issue:	2021.03.09


This extended application report concerns test results obtained in accordance with Test Method: EN 1634-1+A1:2018-03 Fire resistance and smoke control tests for door and shutter assemblies, operable windows and elements of building hardware. Part 1: Fire resistance test for door and shutter assemblies and operable windows.

The extended application process is carried out in conformity with the following extended application standard:
EN 15288-5:2014+A1:2016E Extended application of test results for fire resistance and/or smoke control for door, shutter and operable window assemblies, including their elements of building hardware – Part 5: Fire resistance of hinged and pivoted metal framed glazed doors and operable windows

MB-60E EI-based constructions are classified IN ACCORDANCE WITH EN 13501-2:2016 (Extended Application Report No. 01036/20/R492NZP) and the European Technical Assessment ETA-18/091





Door frame and door leaf – cross-section

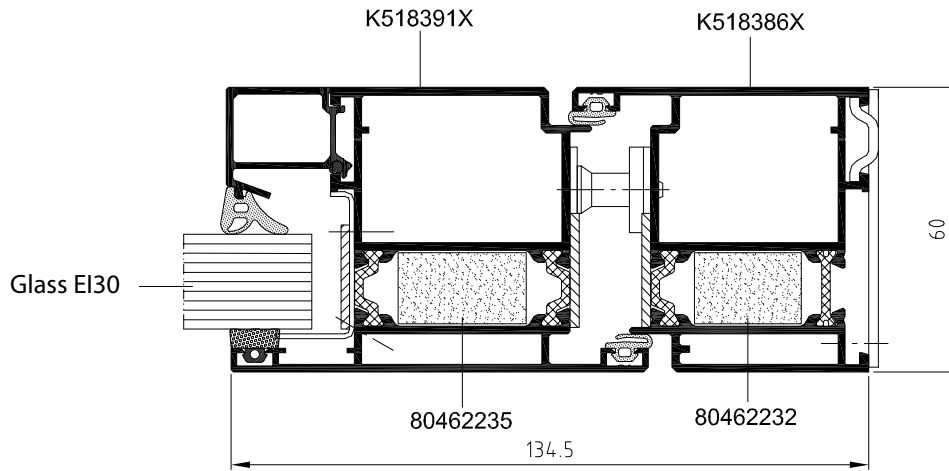


Bottom cross-section with threshold

Door leaf with drop seal – cross-section

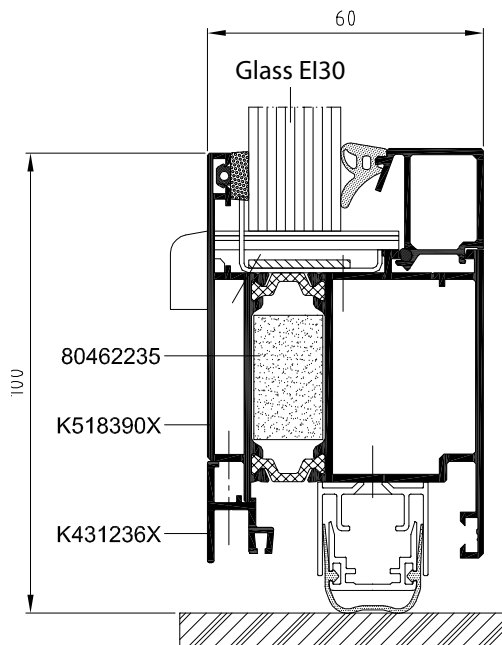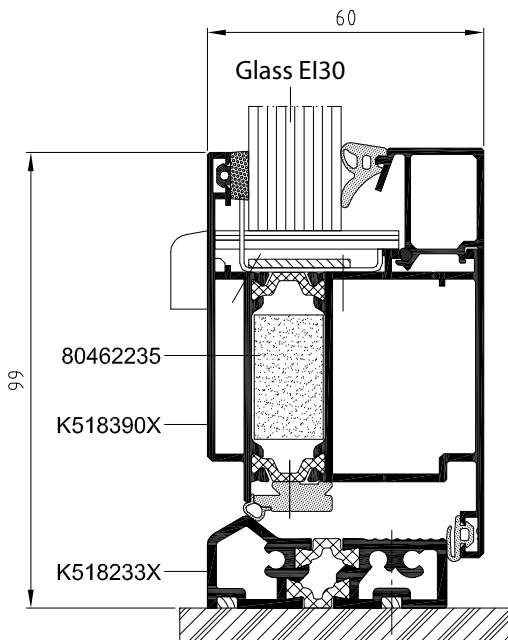

FIRE RATED DOORS AND WALL PARTITIONS

MB-78EI

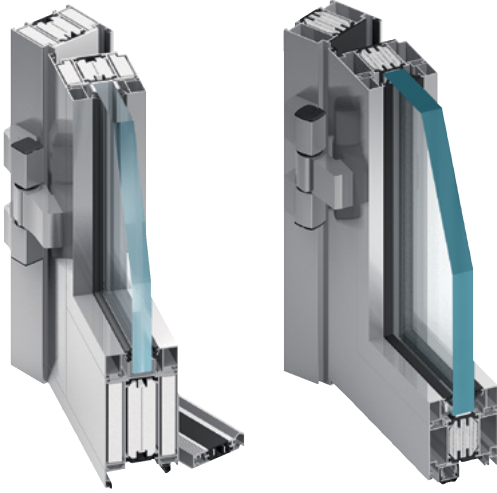

The MB-78EI system has been developed for the producing of internal or external fire-rated partition walls, with single- or double-leaf doors featured by a fire resistance class of EI 30, EI 60 or EI 90 to EN 13501-2. In most cases, these constructions can also have smoke control characteristics (classes S200 & Sa). Numerous tests and calculations have shown that MB-78EI-based products have a very good thermal and acoustic insulation. Due to its characteristics, optimized technology & production costs, the compatibility with other ALUPROF window and door systems and the constant technical development, it is a very popular product, widely used by the construction professionals.

The structure of the MB-78 EI system is based on the thermally-insulated, 78 mm deep aluminium profiles. They are characterized by a low overall heat transfer coefficient "U," thanks in the main, to specialist design thermal break, 34 mm in width. The resistance to high temperature is assured by special fire insulation elements – GKF or CI – introduced into the inner chambers of the profiles and into insulating spaces between profiles and steel accessories and joints.

The range of permissible dimensions of the construction includes fixed partitions up to 5.16 m high and single-swing doors with leaf dimensions: W up to 1.4 m; H up to 3.0 m; the width of double doors may achieve 2.5 m. The MB-78EI door system can exist as an individual "goal-post frame" as part of a larger composite "window wall" or in fire resistant facade, our MB-SR50N EI system. Structures & door sets of this type, both single & double leaf door arrangements, have been successfully tested in a notified laboratory, obtaining fire resistance classes of EI 30 & EI 60.





EI 30

EI 60

EI 90




Max. dimensions of the wall segments

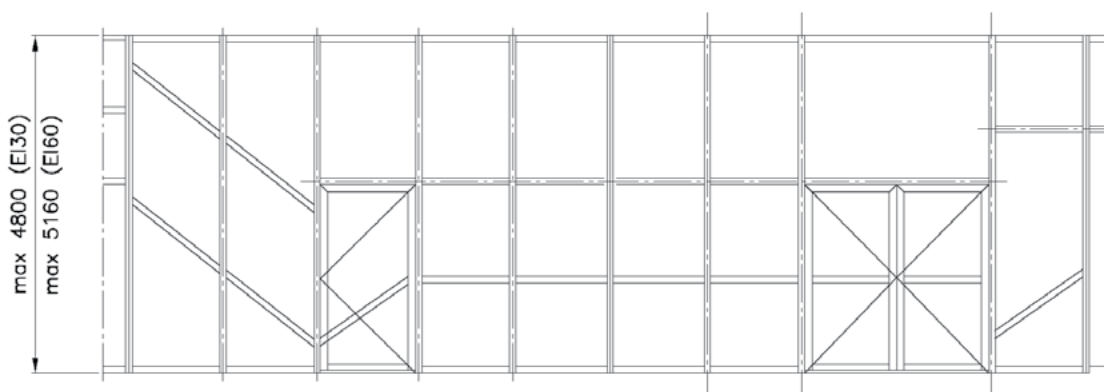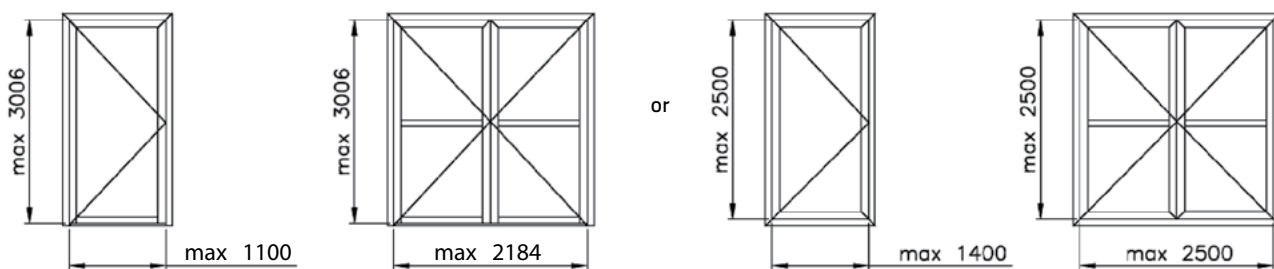

TECHNICAL SPECIFICATION		TECHNICAL PARAMETERS	
Depth of wall & door frame	78 mm	Air Permeability	Class 2, PN-EN 12207:2001
Depth of leaf	78 mm	Watertightness	Class 5A, PN-EN 12208:2001
Width of wall & door frame	51 mm / 72 mm	Fire resistance	Classes EI 30, EI 60, EI 90 in accordance with EN 13501-2
Width of door leaf profiles	72 mm / 51 mm	Thermal insulation (coeff.)	from 1,6 W/(m ² K)
Glazing range	8 – 65 mm	Acoustic Insulation (coeff. R _w)	up to 41 dB

FIRE RATED DOORS AND WALL PARTITIONS / MB-78EI

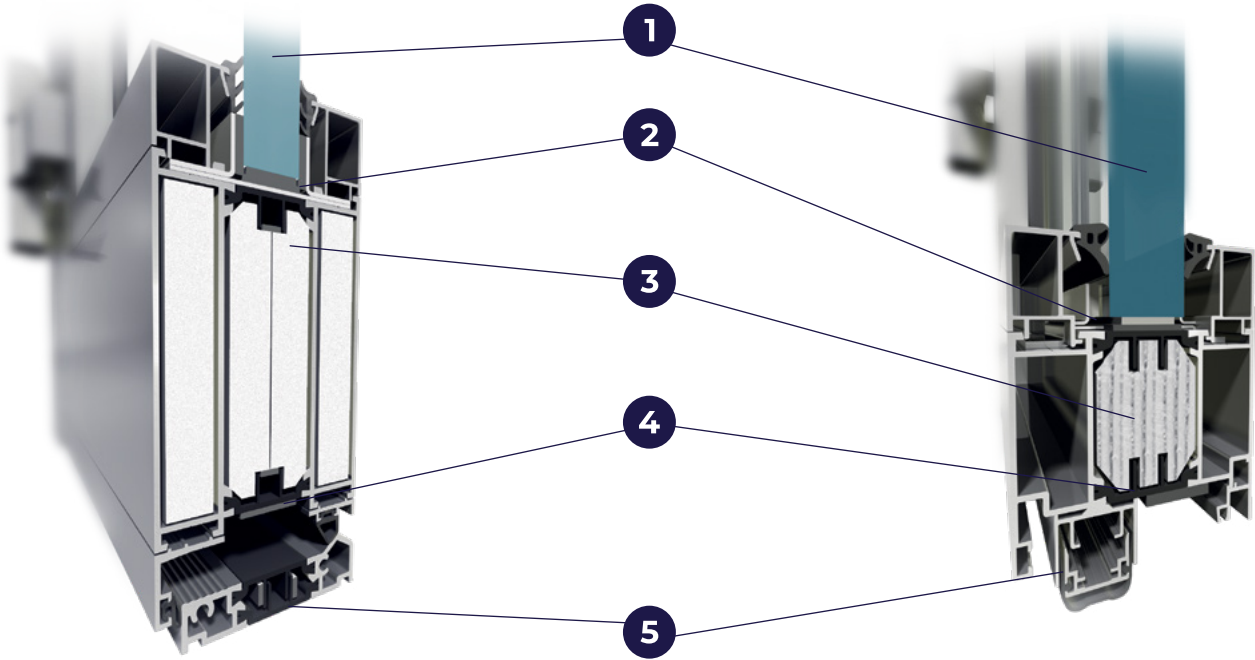

- 1 Single or double fire-resistant glass of a thickness of up to 65 mm
- 2 Steel accessories and expanding tapes that protect the structure from high temperatures
- 3 GKF or CI type fire protection inserted inside the profiles, enables performance classes EI15 to EI 90
- 4 Profiled thermal break that provides adequate protection against heat loss (U_f from 1.6 m^2K)
- 5 Different door bottom rail seal solutions: with & without threshold profile option, obtaining a smoke-proof class $S_{200} S_a$

Extensive design possibilities, a wide range & variety of hinge products, locks, door closers & other hardware, alongside an optimised manufacturing process, are not the only advantages of this system. It also allows the realisation of the product solutions contained on the following pages: MB-78EI DPA automatic sliding door of an EI 15 or EI 30 class & MB-118EI walls of an EI 120 class.

The thickness of infills achievable with the MB-78EI system is from 8 to 65 mm. Infills may include all typical fire-resistant glass panes, as well as layered opaque elements consisting of sheet metal and appropriate panels that ensure the required fire resistance.

The MB-78EI system is classified in accordance with EN 13501-2 (Classifications No. 2-01036/19/R465NZE, 01036.1/20/R492NZE) and has a certificate CERTIFIRE by the Institute of Warrington Certification Ltd No. CF 5138.

ZAMIAŁ INŻYNIERII ELEMENTÓW BUDOWLANYCH
Instytut Techniki Budowlanej

CLASSIFICATION N° 2-01036/19/R465NZE/EN
PRODUCER: ALUPROF S. A.
ul. Warszawska 153, 43-300 Bielsko-Biala - Poland
SYSTEM: ALUPROF MB-78 EI
PRODUCT: Double-leaf doors made of aluminum profiles of the ALUPROF MB-78 EI system (hinged, opening outside)

TEST MODEL INFORMATION: Sample size: external dimensions of the door frame (cm) = 200x200 mm; leaf dimensions (cm) = 1430 x 1114 (mm x 200mm); Construction: aluminum; Filling: PUFlex E501 / 16 / E505 / 16 / E505 insulated glass (IGU) triple; Filling: FAPM steel hinges - 3-leaf hinge, Lata + 67 mm x 4 pin per leaf, FAPM steel lock, 3-point automatic L24x2 mm (2200 mm), WALE steel handle, ASA-ABS-PC OCC10 steel pressure door closer

BUILDING ELEMENTS ENGINEERING DEPARTMENT ITB confirms Type Testing double leaf door test results in accordance with the product standard PN-EN 14351-1 + A2: 2016 clause 4.2, 4.5, 4.8

Essential characteristics / Product performance	Test method	Test result / Class	Classification standard	Reference document
Type testing				
1. Air permeability	PN-EN 1028:2016	Class 4	PN-EN 12207:2001	PN-EN 12207:2001
2. Water-tightness	PN-EN 1027:2016	Class 4A (100Pa)	PN-EN 12208:2001	PN-EN 14351-1/A2:2016
3. Resistance to wind load - deflection	PN-EN 12211:2016	Class C3 (300Pa)	PN-EN 12208:2001	PN-EN 12210:2001
4. Safety test		ET200Pa		

The test results are in accordance with the test report No. LZ03-01036/19/R465NZE/EN. These results refer to tested properties can be used for CE marking, in accordance with the rules specified in the product standard EN 14351-1/A2:2016 - Annexes A-E and F.

Authorizing person: *Marek Jakubowski*
Head of the ITB Building Elements Engineering Department: *Marek Jakubowski*

ITB Instytut Techniki Budowlanej
The Building Elements Engineering Department (ul. Warszawska 153, 43-300 Bielsko-Biala, Poland)
The Building Research Institute (ul. Dąbrowskiego 156, 01-040 Warszawa, Poland)
The Building Research Institute (ul. Dąbrowskiego 156, 01-040 Warszawa, Poland)
The Building Research Institute (ul. Dąbrowskiego 156, 01-040 Warszawa, Poland)

Instytut Techniki Budowlanej
Research and development works | Accredited Group of Laboratories |
Notified Body N° 1488 (ISO) member | Certified management systems ISO 9001, ISO 27001

EXTENDED APPLICATION REPORT FOR FIRE RESISTANCE

Order No: 1036.20/R492NZP
Owner of this report: ALUPROF S.A.
153, Warszawska St.
43-300 Bielsko-Biala
Poland

Prepared by: Fire Research Department
Building Research Institute
21, Krakowska St.
PL 00-656 Warsaw

Name of product: Aluminum framed doors of ALUPROF MB 78EI E10 system

Report No: 1036.120/R492NZP.ENG
Issue number: 1
Date of issue: 2020.09.22

This extended application report concerns test results obtained in accordance with Test Method: EN 1634-1+A1:2016-03 Fire resistance and smoke control tests for door and shutter assemblies, operable windows and elements of building hardware - Part 1: Fire resistance test for door and shutter assemblies and operable windows

The extended application process is carried out in conformity with the following extended application standard: EN 15266-5:2014+A1:2016 Extended application of test results for fire resistance and/or smoke control for door, shutter and operable window assemblies, including their elements of building hardware - Part 5: Fire resistance of hinged and pivoted metal framed glazed doors and operable windows.

certifire

CERTIFICATE OF APPROVAL
No CF 5138

This is to certify that, in accordance with TS25 General Requirements for Certification of Fire Protection Products The undermentioned products of

ALUPROF S.A.
ul. Warszawska 153,
43-300 Bielsko-Biala, Poland
Tel: +48 33 851 03 09

Have been prepared against the requirements of the Technical Schedule(s) detailed below and are approved for use subject to the conditions specified therein.

CERTIFIED PRODUCT	TECHNICAL SCHEDULE
Aluminium Framing Systems Type MB 78 EI for Glazed Walls and Doors	TS25 Fire Resistant Glass, Glazing Systems and Materials


Signed and sealed for and on behalf of CERTIFIRE

Sir Ken Knight
Chairman - Management Council
Page 1 of 29


Issued: 4th April 2013
Valid to: 3rd April 2018

DO NOT VOID WHEN AUTHENTICATED SEAL IS BROKEN


Door frame and door leaf – cross-section

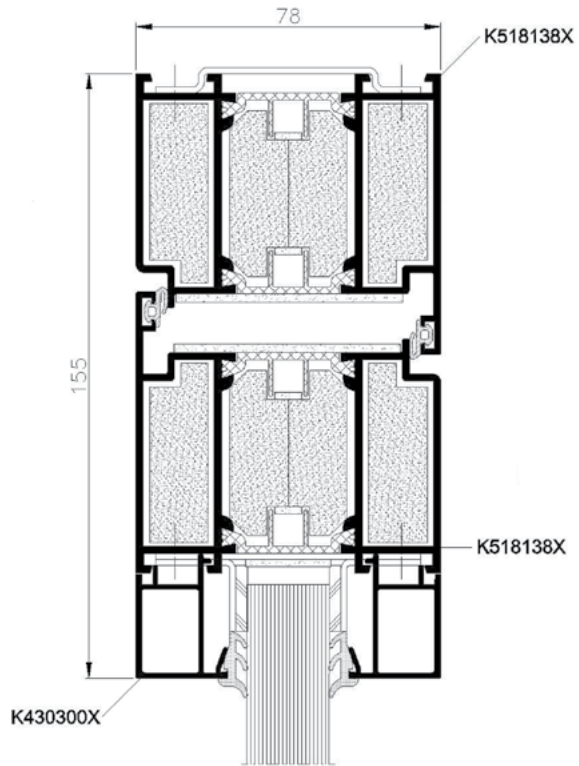


Door frame and door leaf with CI infills – cross-section

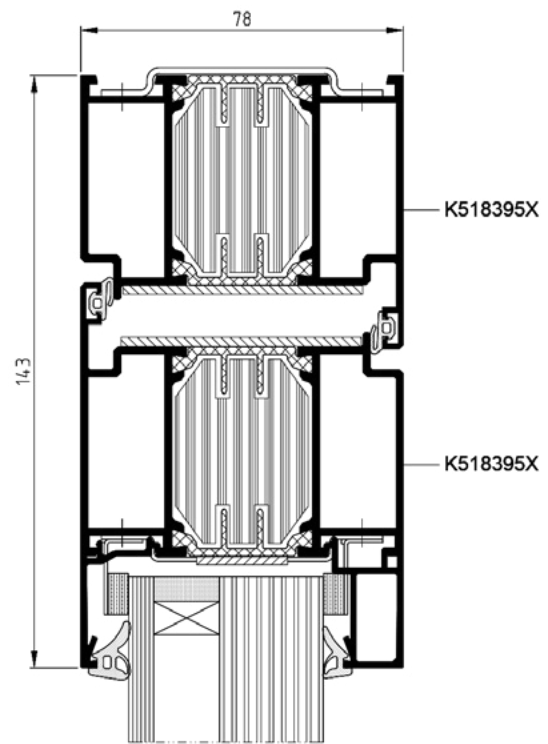


Door without a threshold – bottom cross-section

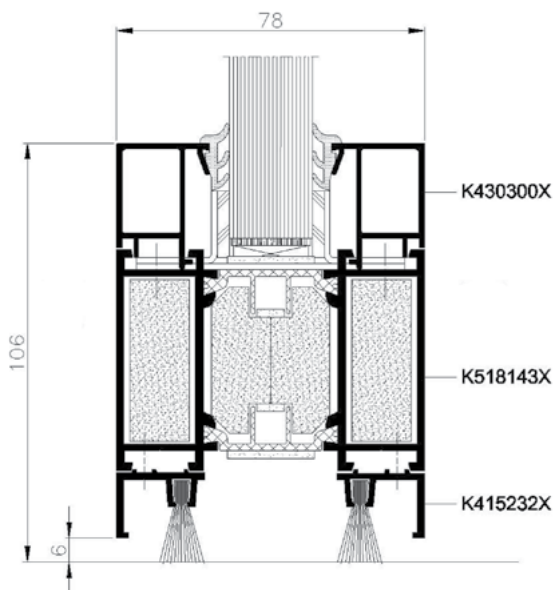


Door leaf with drop seal – cross-section

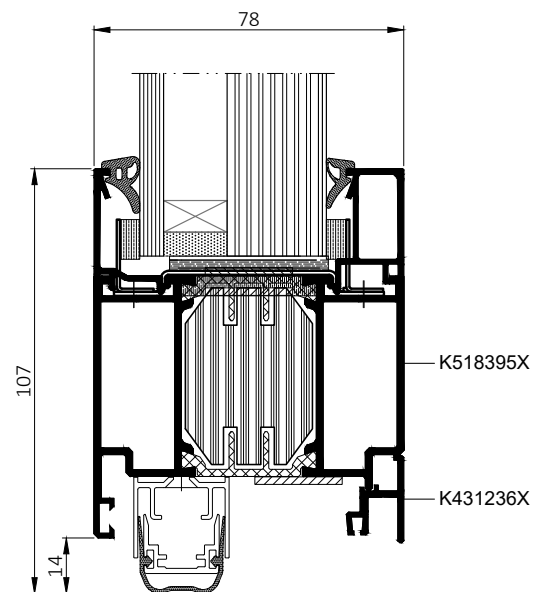


Bottom cross-section with threshold

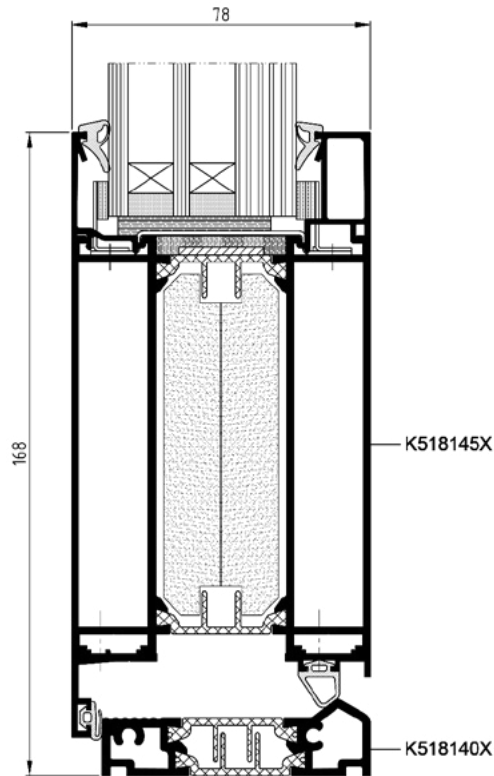

Door in display window assembly - cross section

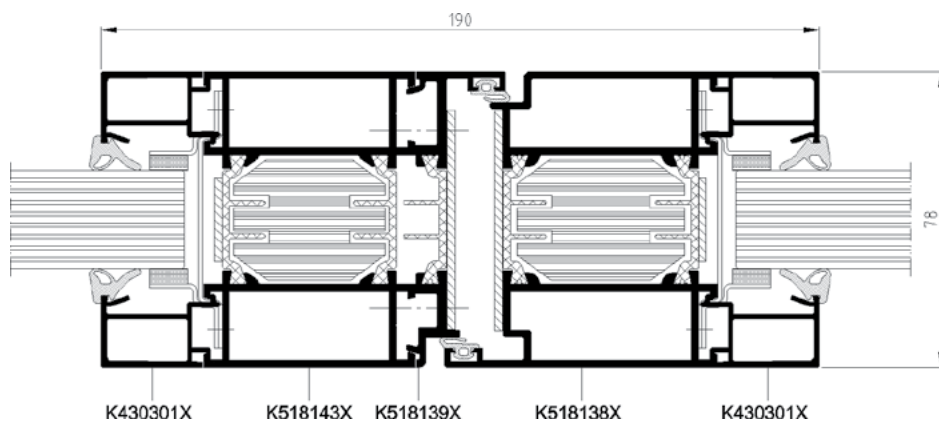


MB-78EI doors cross-section in the MB-SR50N EI façade

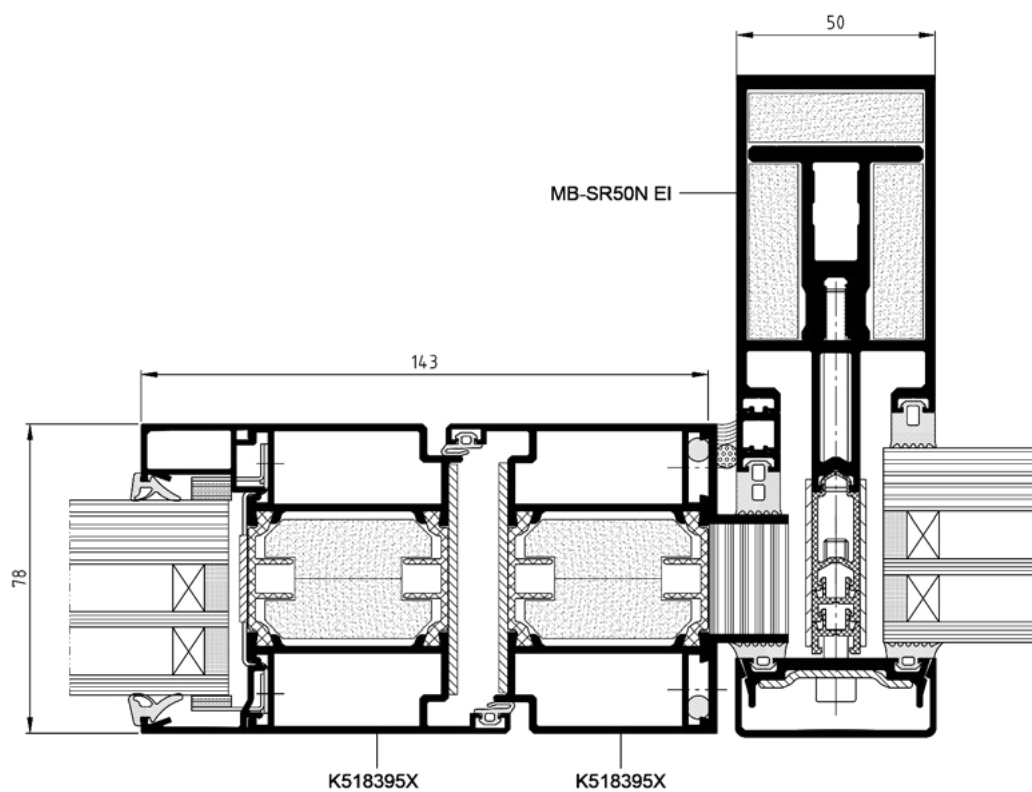

SILICONE JOINED FIRE-RATED GLAZED WALLS

MB-78EI

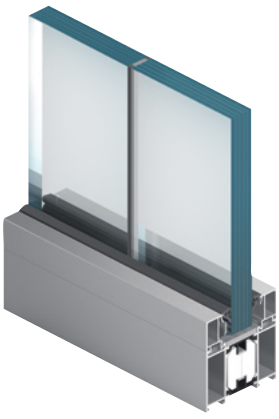

Aluprof offers MB-78EI system-based solution for transparent fire-resisting walls, the so-called “silicone joined glazed walls”. It enables the fabrication of internal partitions without the visible vertical profiles that separate the individual modules of the wall, whilst preserving the full fire resistance. The gap between the glass panes is only 4 mm and is filled with firestop intumescent material and non-flammable silicone. The silicone is available in three colours (black, grey, or white). That way, fire-resisting partitions can be up to 3.6 m high, with modules’ width of up to 1.8 m. Fire tests carried out at the Building Research Institute (ITB) included a “free edge” model, so there is no limit as to the maximum length of this type of wall.


EI 30

EI 60



SILICONE JOINED FIRE-RATED GLAZED WALLS

MB-78EI

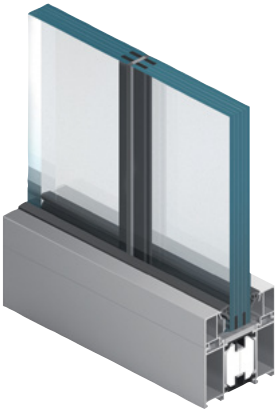


MB-78EI-based silicone joined glazed walls enable to freely design and build very large internal partition walls. With their transparent modules, the constructions made of this system make every room optically bigger. What's more, the system provides security and helps to organize fire zones in the building, whilst ensuring the appropriate conditions for the evacuation of building occupants.

EI 30

EI 60



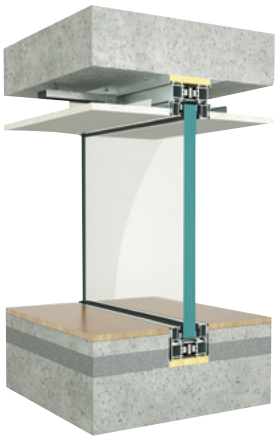

SILICONE JOINED FIRE-RATED GLAZED WALLS

MB-78EI







Aluprof offers also a version with profiles fitted in the floor, walls and ceiling. Hidden wall mount enhances this optical effect, while maintaining the full fire protection of the construction.

EI 30


EI 60



Silicone joined glazed wall MB-78EI - examples

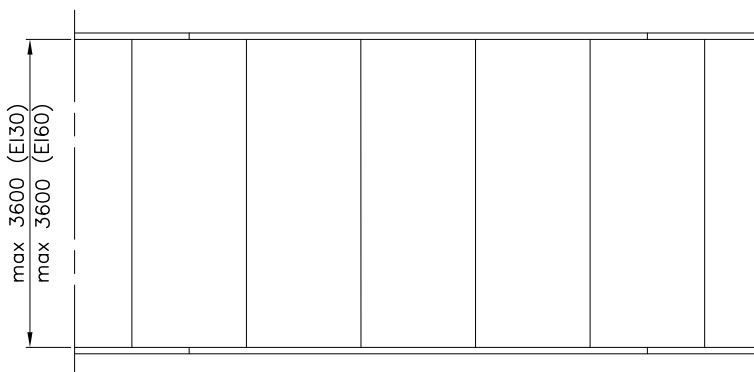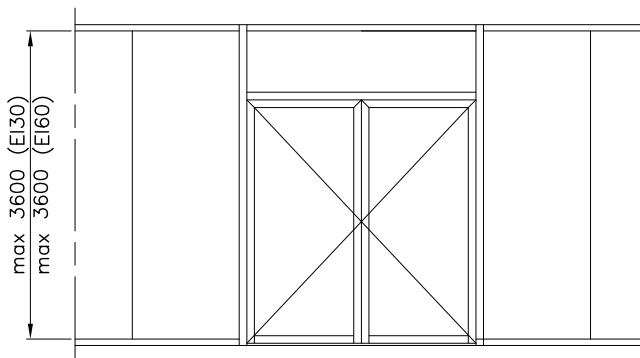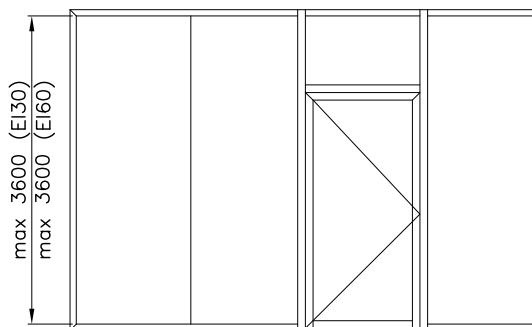

SILICONE JOINED FIRE-RATED GLAZED WALLS / MB-78EI

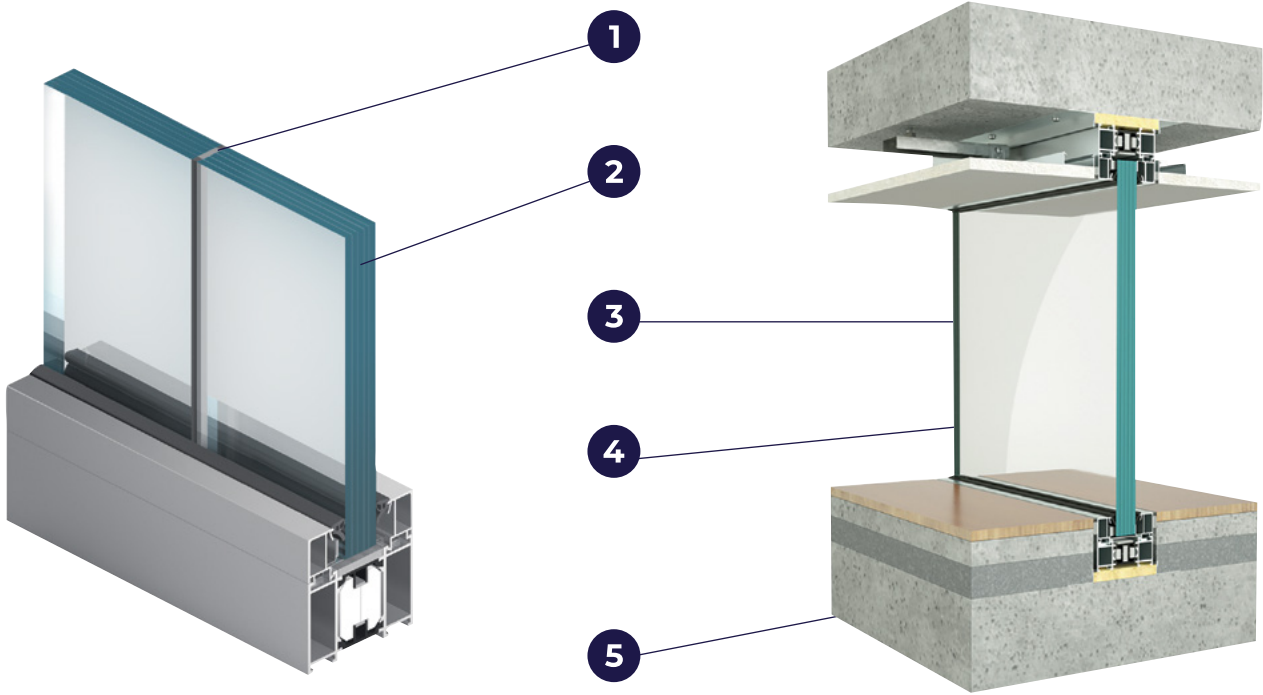

- 1 The gap between the modules is only 2 or 4 mm wide
- 2 Fire glass thickness: 17 mm or 23 mm (EI30), 26 mm or 31 mm (EI60)
- 3 The maximum height of the partitions: 3.6 m; no limits as to the maximum length
- 4 The maximum width of glass modules: 1.5 m (max height: 3.6 m) and 1.8 m (max height 3.0 m)
- 5 Solution available with profiles fitted in the floor, walls and ceiling

ITB
Instytut Techniki Budowlanej

Budowlana nauka i Prace rozwojowe | Advanced Research Laboratories
Techniczny Instytut Techniczny w 1480 | Centrum ECR | Certified Research systems for applications ISO 9001, ISO 17025
ZAKŁAD BADAŃ ODWROTNYCH | 02-698 Warszawa | ul. Koszykowa 21 | tel. 22 863 34 21 | fax 22 847 23 11 | itb@itb.pl | www.itb.pl

CLASSIFICATION OF FIRE RESISTANCE
IN ACCORDANCE WITH EN 13501-2:2016

Sponsor: ALUPROF S. A.
153, Warszawska St.
43-300 Białsko-Białe
Poland

Prepared by: Building Research Institute (ITB)
1, Fibrowa St.
PL 00-611 Warsaw
Fire Research Department
21, Koszykowa St.
PL 02-656 Warsaw

Product name: Non load-bearing, aluminum, profile walls with structural glazing of the system Aluprof MB-78EI E30

Classification report No.: 01036.1/21/R562NZPENG

Issue number: 1 Copy No. 1 / 2 / 3

Date of issue: 2021.10.16

Appendix: No. 1 Pages: 29

This classification report consists of 17 pages and only to be used or reproduced in its entirety.

00-011 Warszawa | ul. Fibrowa 1 | tel. 22 863 34 21 | fax 22 847 23 11 | itb@itb.pl | www.itb.pl

ITB
Instytut Techniki Budowlanej

Research and development works | Accredited Group of Laboratories
Instytut Techniczny w 1480 | ECR member | Certified management systems ISO 9001, ISO 17025

**EXTENDED APPLICATION REPORT
FOR FIRE RESISTANCE**

Order No.: 01036.1/19/R444NZP

Owner of this report: ALUPROF S. A.
153, Warszawska St.
43-300 Białsko-Białe
Poland

Prepared by: Building Research Institute (ITB)
1, Fibrowa St.
PL 00-611 Warsaw
Fire Research Department
21, Koszykowa St.
PL 02-656 Warsaw

Name of product: Non load-bearing, aluminum, profile walls with structural glazing of the system Aluprof MB-78EI E60

Report No.: 01036.421/R562NZPENG

Issue number: 1

Appendix: 29 Pages

Date of issue: 2021.09.29

This extended application report concerns test results obtained in accordance with Test Method: EN 1364-1:2016: Fire resistance tests for non-load-bearing elements - Part 1: Walls. The extended application process is carried out in conformity with the following extended application standard: EN 15254-4:2016 Extended application of results from fire resistance tests. Non-load-bearing walls. Glazed constructions.

00-011 Warszawa | ul. Fibrowa 1 | tel. 22 863 34 21 | fax 22 847 23 11 | itb@itb.pl | www.itb.pl

ITB
Instytut Techniki Budowlanej

Research and development works | Accredited Group of Laboratories
Instytut Techniczny w 1480 | ECR member | Certified management systems ISO 9001, ISO 17025

European Technical Assessment

**ETA-21/0516
of 30/06/2021**

General Part
Technical Assessment Body issuing the European Technical Assessment: Instytut Techniki Budowlanej

Trade name of the construction product: ALUPROF MB-78EI

Product family to which the construction product belongs: Internal Partition Kits for use as non-load bearing walls

Manufacturer: ALUPROF S.A.
ul. Warszawska 153
43-300 Białsko-Białe, Poland

Manufacturing plant: ALUPROF S.A.
ul. Warszawska 153
43-300 Białsko-Białe, Poland

This European Technical Assessment contains: 29 pages including 4 Annexes which form an integral part of this Assessment.


This European Technical Assessment is issued in accordance with regulation (EU) No 305/2011, on the basis of: European Assessment Document EAD 21/05/05-02-06/05: Internal partition kits for use as non-load-bearing walls

00-011 Warszawa | ul. Fibrowa 1 | tel. 22 863 34 21 | fax 22 847 23 11 | itb@itb.pl | www.itb.pl


Silicone joined glazed walls MB-78EI have ITB's Classifications No 01036.1/19/R444NZP" dać "01036.1/21/R562NZP, 01036.1/21/R562NZP and European Technical Assessment No ETA-21/0516 and European Technical Assessment




Partition with a ceiling-integrated profile, cross-section

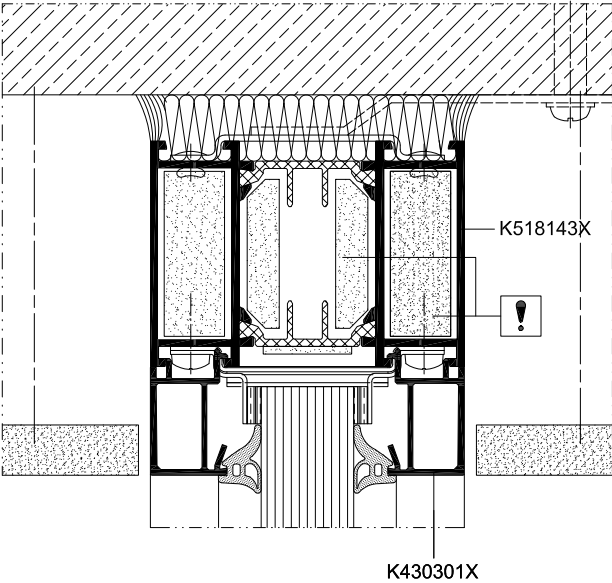

Partition with a floor-integrated profile, cross-section

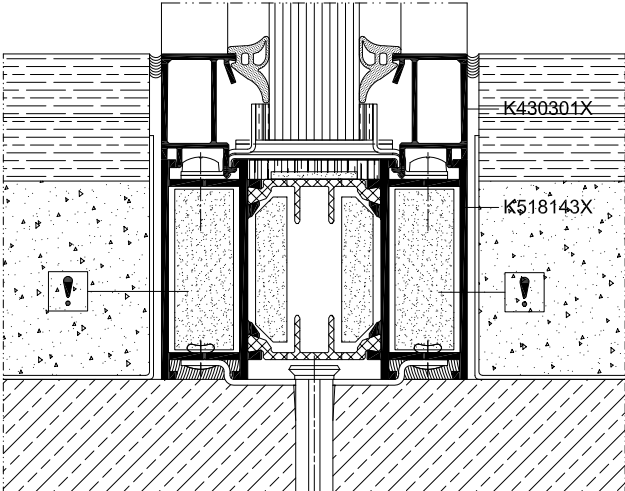

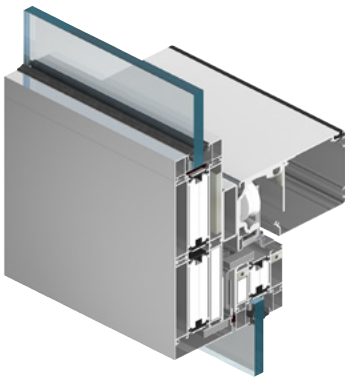

AUTOMATIC FIRE RATED SLIDING DOORS

MB-78EI DPA


The MB-78EI DPA system is intended to make fire rated partitions with automatic, single and double leaf sliding doors. Their fire resistance class of EI 15 and EI 30 is kept when they are exposed to fire both from the outside and the inside. The structure is based on the system of fire walls with the MB-78EI doors, from which comes most of the production technology and components, including main profiles, glazing beads, cooling inserts, expanding tapes, gaskets, and most of the accessories. A wide range of glazing of these structures is the same as in the basic system and allows the installation of all common fire-resistant glazing of EI 15 and EI 30 class, including any fusion into an insulation package.

The MB-78EI DPA sliding door's drive can be installed on walls/system walls. Mechanisms that are intended to be used in this system allow a smooth and trouble-free operation of the door with a 200 kg leaf.

Max. dimensions of the structure in clear opening:

- height of a single and double leaf door : up to 2550 mm.
- width of a single door: up to 1350 mm.
- width of a double door: up to 2710 mm.

EI 30

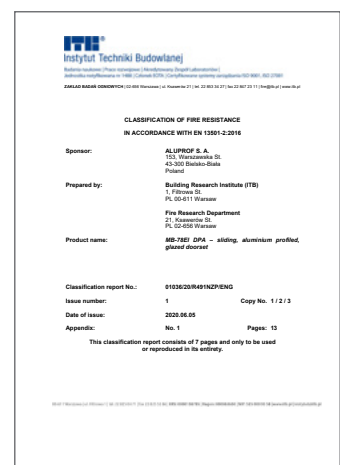


The MB-78EI DPA system holds an ITB's Classification report No.: 01036/20/R491NZP and a certificate CERTIFIRE delivered by Warrington Certification Ltd No. CF 5138







Upper sliding doors – cross-section

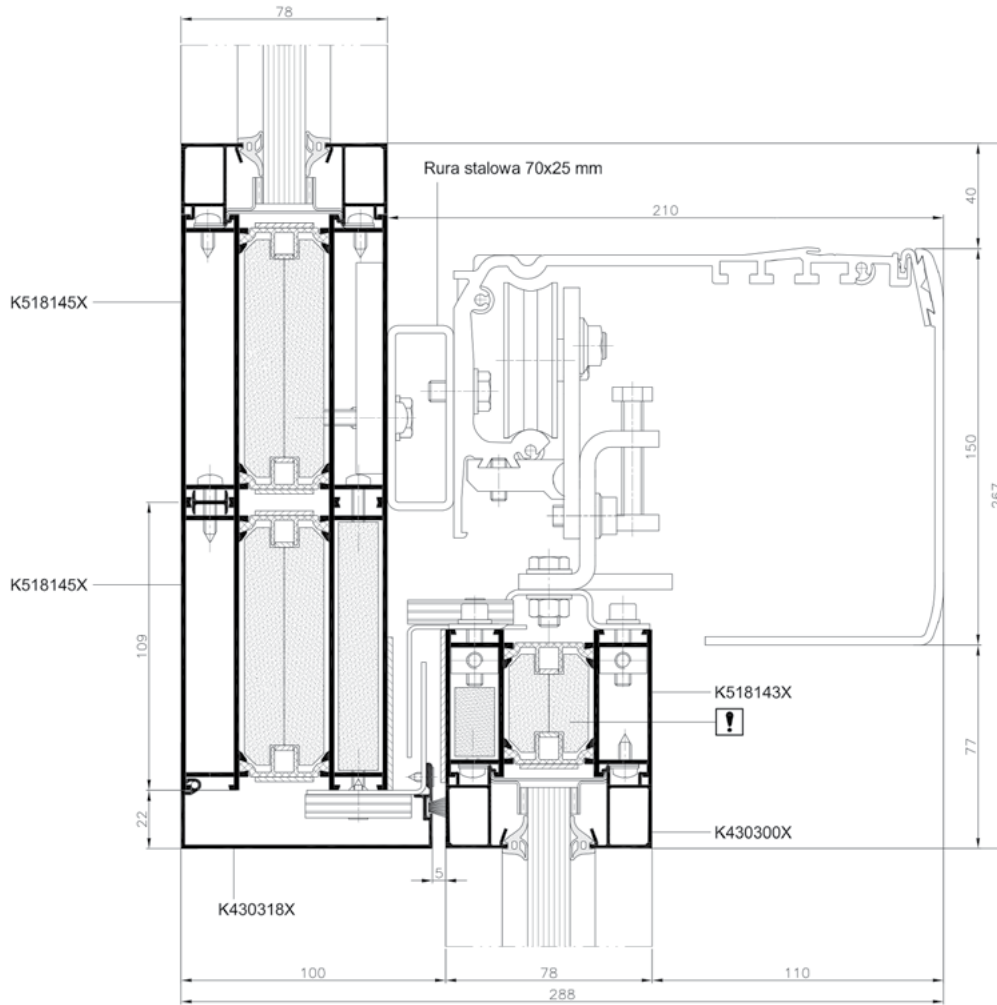

Lateral sliding doors – cross-section

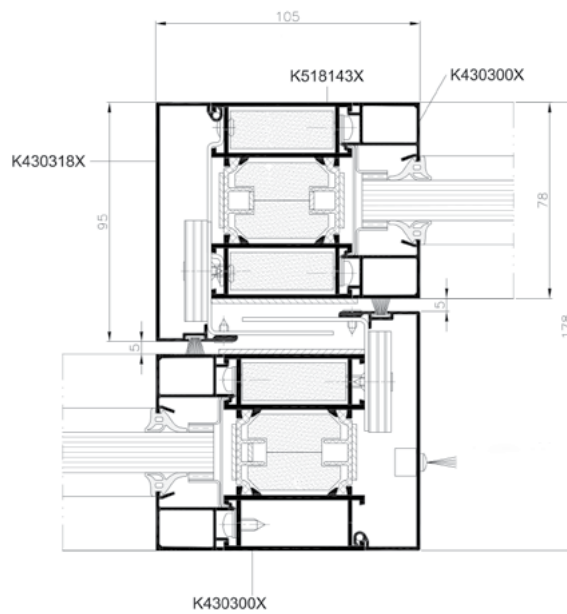

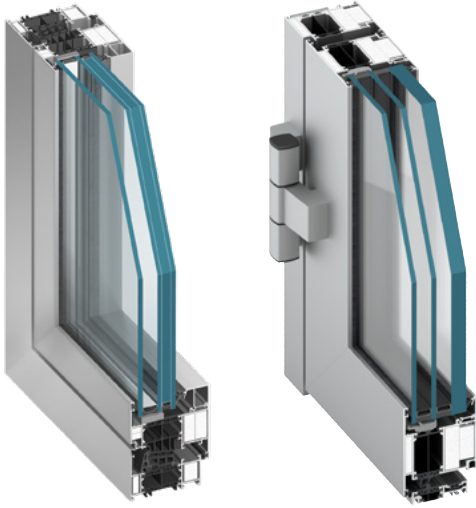

FIRE-RATED WINDOWS, DOORS AND PARTITION WALLS


MB-86EI

The MB-86EI is a system of thermally insulated, fire-rated windows, doors and partitions. It is designed to be used for building external fire compartments fitted with operable windows and doors and fixed partitions with a primary fire-rating of EI30, EW30 and EI15, in line with the EN 13501-2 standard. The structure is based on our MB-86 system, meaning that it features high thermal and acoustic insulation, along with excellent water- and airtight parameters.

EI 30









Max. dimensions of the windows

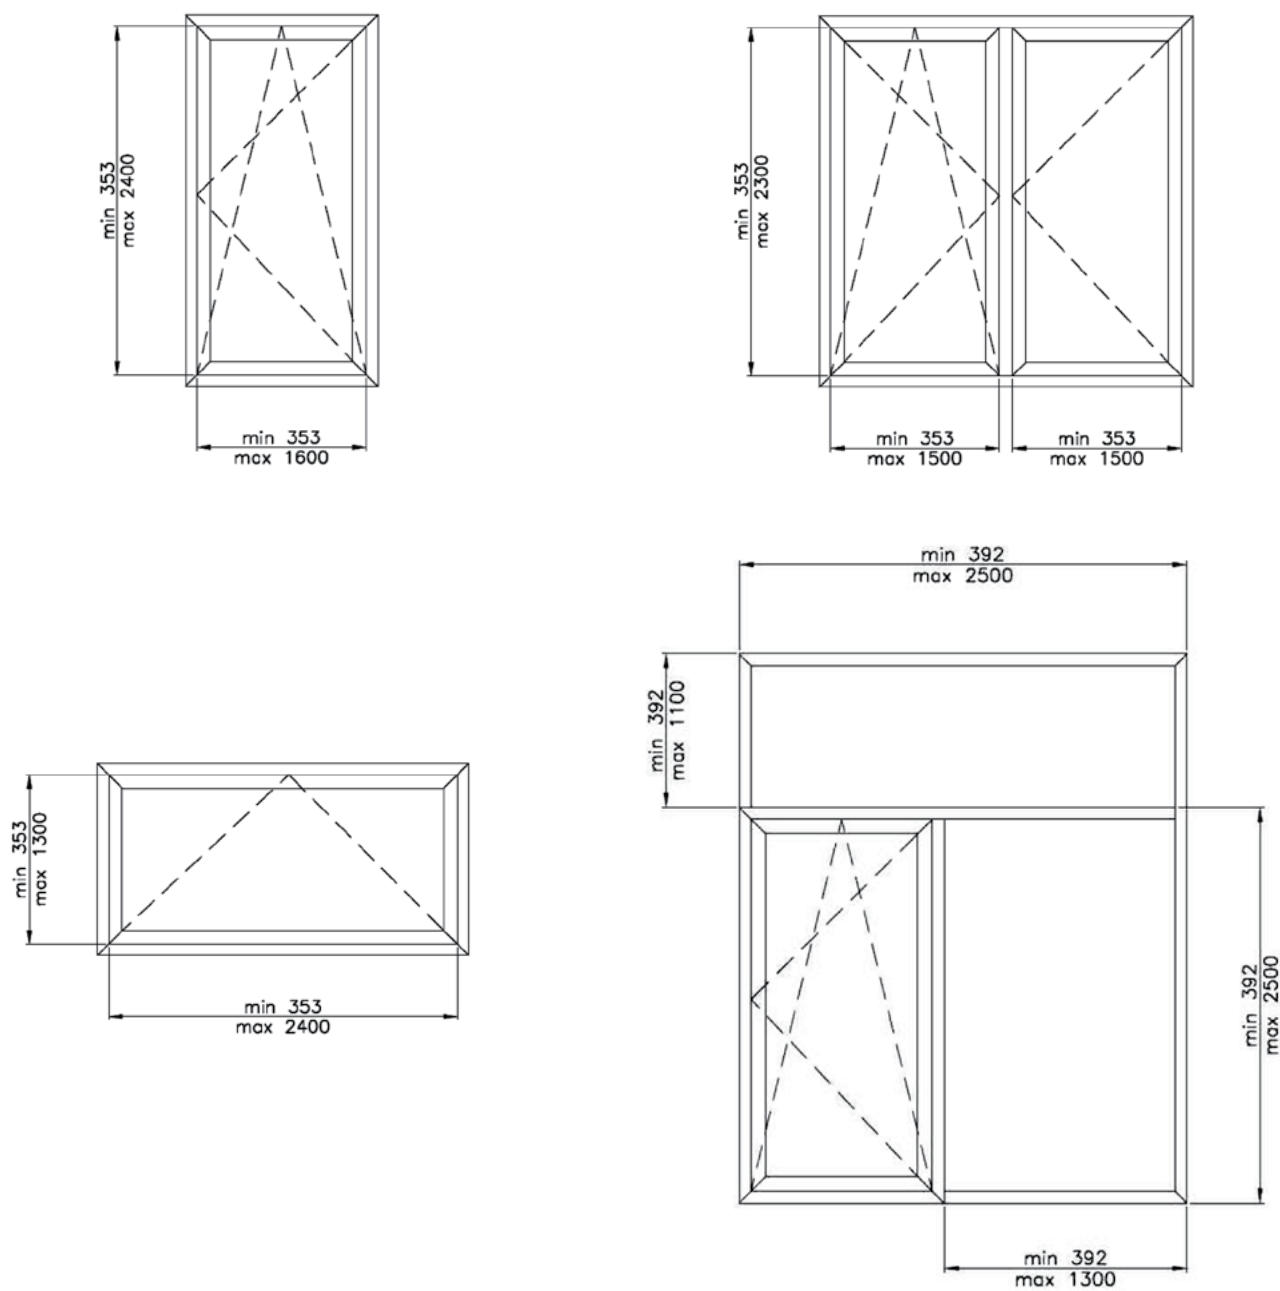


TECHNICAL SPECIFICATION	WINDOWS MB-86EI	DOORS MB-86EI
Frame depth	77 mm	77 mm
Casement depth	86 mm	77 mm
Glazing thickness	frame: 13 to 61 mm, casement: 22 up to 70 mm	41-61 mm H do 3000 mm, L do 1300 mm
Max casement weight	130 kg	200 kg
TECHNICAL PARAMETERS	WINDOWS MB-86EI	DOORS MB-86
Air leakage	class 4, EN 12207	class 4, EN 12207
Water resistance	class E 1500, EN 12208	class E 1350, EN 12208
Wind resistance	class C5, EN 12210	class C5/B5, EN 12210
Thermal insulation	U_f od 1,07 W/(m ² K), U_w od 0,86 W/(m ² K)*	U_f od 1,76 W/(m ² K)
Fire resistance rating	class EI30	class EI30

* - for a 2000 x 1100 mm window with triple glazing unit $U_g=0.5$ W/(m²K), warm spacer and EI30-rated fire-resisting glazing pane

Max dimmensions of doors and partition walls

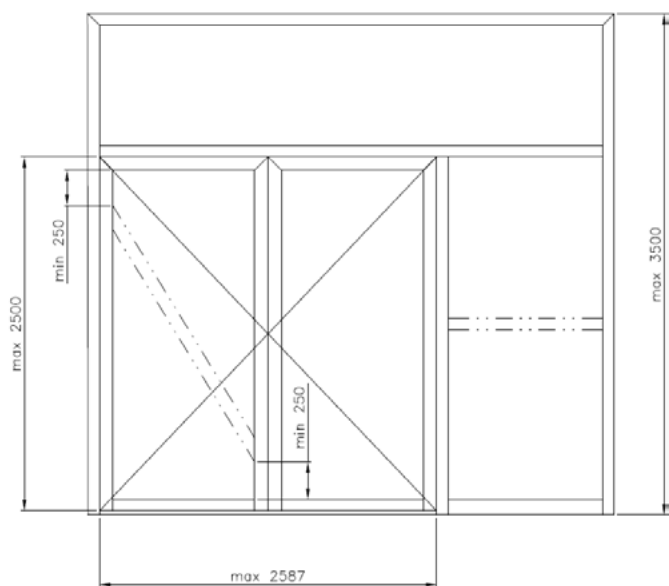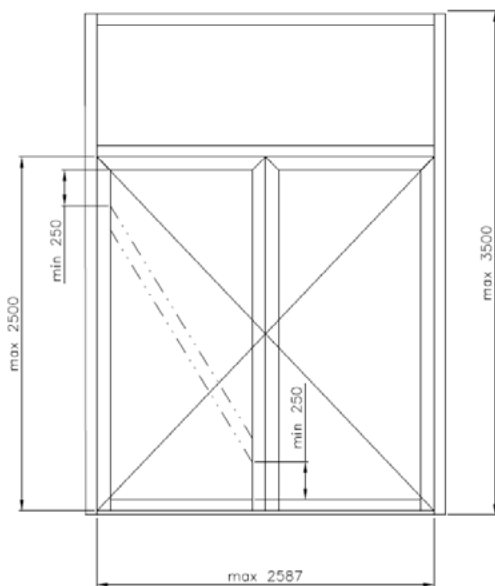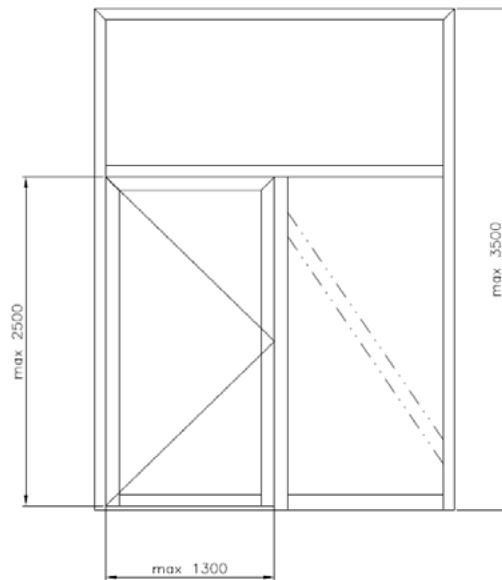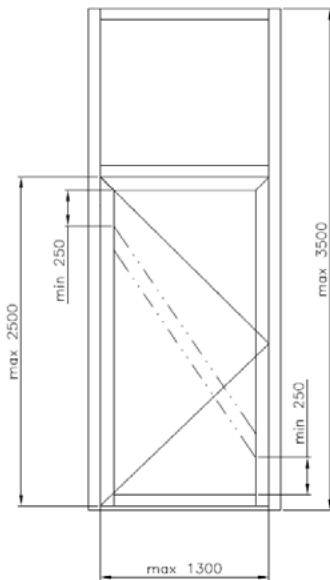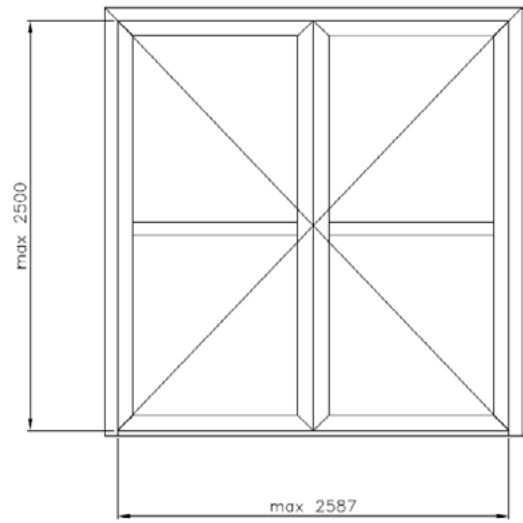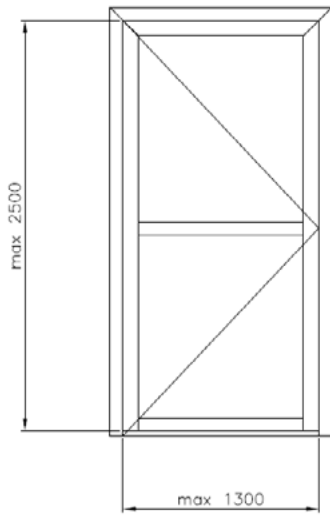

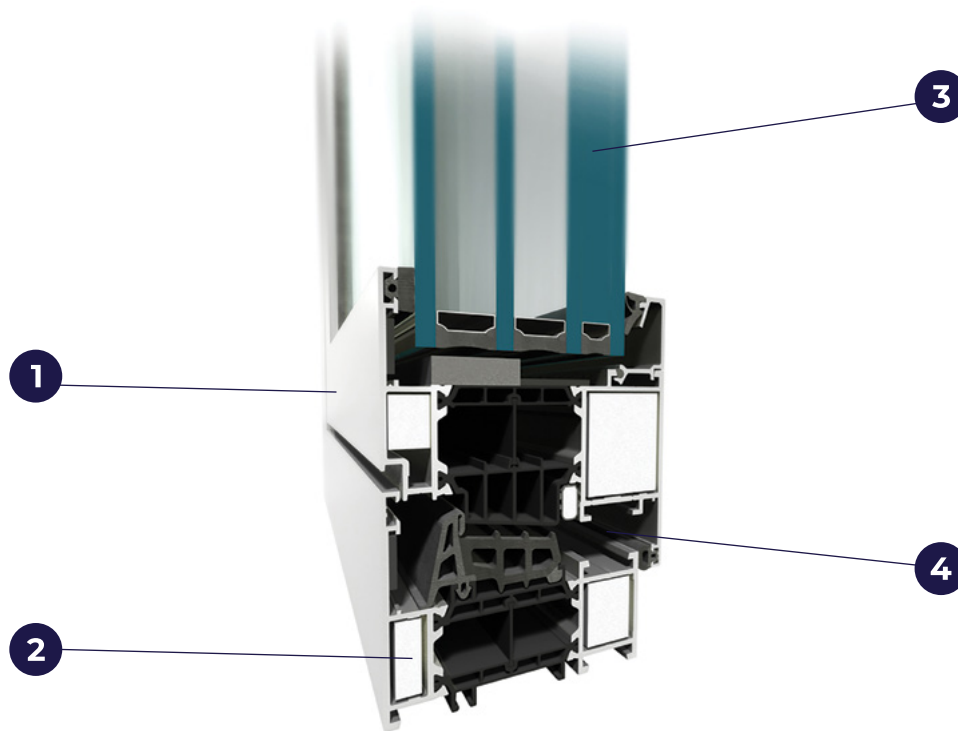

- 1 three-chambered profiles, with a 43 or 42 mm-wide insulation chamber between thermal breaks as a central part
- 2 fire resistance is ensured by the appropriately rated glass panes, fire insulation elements in the internal chambers of aluminium profiles and special accessories and materials used in the space between aluminium profiles and the glazing
- 3 wide range of glazing thickness allows for use of different types of insulated glass, including triple glazing units
- 4 hardware used in MB-86EI is typically RC2 burglar-resistant-rated

MB-86 EI-based constructions hold an ITB's Classifications No. 1036/19/R419NZZ, 1036/18/R360NZZ and 1036/20/R547NZZ

ITB
Instytut Techniki Budowlanej
Research and development works | Accredited Group of Laboratories |
Notified Body N° 1488 (EU) member | Certified management systems ISO 9001, ISO 27001

**CLASSIFICATION OF FIRE RESISTANCE
IN ACCORDANCE WITH EN 13501-2:2016**

Order No.: 1036/18/R360NZZ
Owner of this report: ALUPROF® S.A.
ul. Warszawska 153
43-300 Bieleńsko - Biały
Poland

Prepared by: Fire Research Department
Building Research Institute
21, Kazimierz St.
PL 02-656 Warsaw

Name of product: Aluminium framed windows of ALUPROF® MB-86EI
system

Classification Report No.: 1036.1/18/R360NZZ/ENG
Issue number: 1
Copy number: 1
Date of issue: 2018.12.20

This classification report consists of 14 pages and may only be used or reproduced in its entirety.

© 2017 Instytut Techniki Budowlanej | ul. Piłsudskiego 26 | 00-665 Warszawa | tel. 22 629 12 00 | fax 22 629 12 01 | e-mail: biuro@itb.pl | www.itb.pl | instytut@itb.pl

ITB
Instytut Techniki Budowlanej
Research and development works | Accredited Group of Laboratories |
Notified Body N° 1488 (EU) member | Certified management systems ISO 9001, ISO 27001

**CLASSIFICATION OF FIRE RESISTANCE
IN ACCORDANCE WITH EN 13501-2:2016**

Order No.: 1036/20/R547NZZ
Owner of this report: ALUPROF® S.A.
ul. Warszawska 153
43-300 Bieleńsko - Biały
Poland

Prepared by: Fire Research Department
Building Research Institute
21, Kazimierz St.
PL 02-656 Warsaw

Name of product: Aluminium, profiled doors of ALUPROF® MB-86EI
Ei,30 system

Classification Report No.: 1036/20/R547NZZ/ENG
Issue number: 1
Date of issue: 2020.05.24

This classification report consists of 18 pages and may only be used or reproduced in its entirety.

© 2017 Instytut Techniki Budowlanej | ul. Piłsudskiego 26 | 00-665 Warszawa | tel. 22 629 12 00 | fax 22 629 12 01 | e-mail: biuro@itb.pl | www.itb.pl | instytut@itb.pl

ITB
Instytut Techniki Budowlanej
Badania i prace rozwojowe | Pracownia Badawcza i Laboratorium |
Jednostka notyfikowana nr 1488 | Czynnik EOTX | Certyfikowane systemy zarządzania ISO 9001, ISO 27001

**KLASYFIKACJA W ZAKRESIE ODPORNOŚCI OGNIOWEJ
ZGODNIE Z PN-EN 13501-2:2016-07**

Nr zlecenia: 1036/19/R419NZZ
Właściciel opracowania: ALUPROF® S.A.
ul. Warszawska 153
43-300 Bieleńsko - Biały

Klasyfikacja opracowana przez: Zakład Badań Ogniwych
Instytutu Techniki Budowlanej
ul. Piłsudskiego 26
00-611 Warszawa


Nazwa wyrobu: Ściany aluminiowe, profile, systemu
ALUPROF® MB-86EI

Numer klasyfikacji: 1036/19/R419NZZ
Numer wydania: 1
Numer egzemplarza: 1
Data wydania: 2019.06.28


Niniejszy raport klasyfikacyjny składa się z 8 stron i może być używany lub powielany wyłącznie w całości.

© 2017 Instytut Techniki Budowlanej | ul. Piłsudskiego 26 | 00-665 Warszawa | tel. 22 629 12 00 | fax 22 629 12 01 | e-mail: biuro@itb.pl | www.itb.pl | instytut@itb.pl


Window cross-section

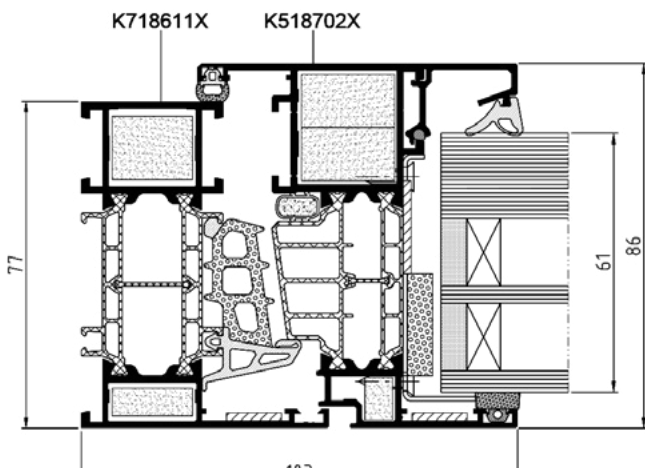



Balcony door with low-level threshold, cross-section

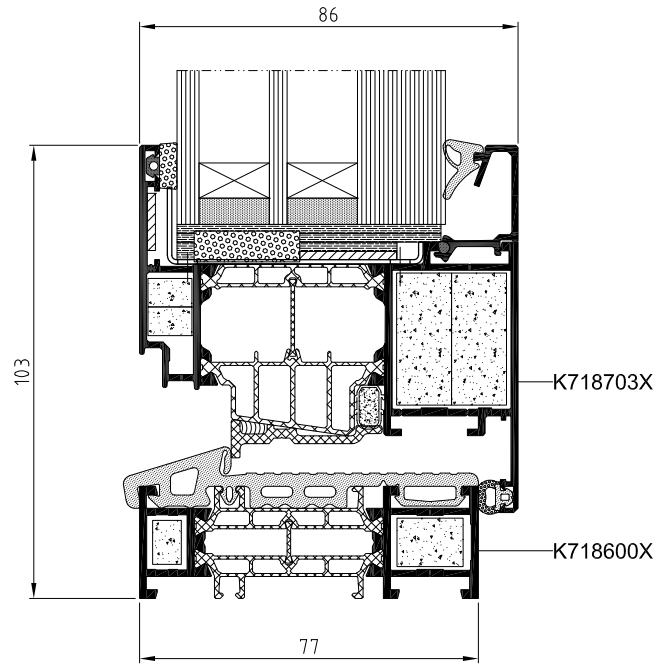


Double window with floating mullion, cross-section

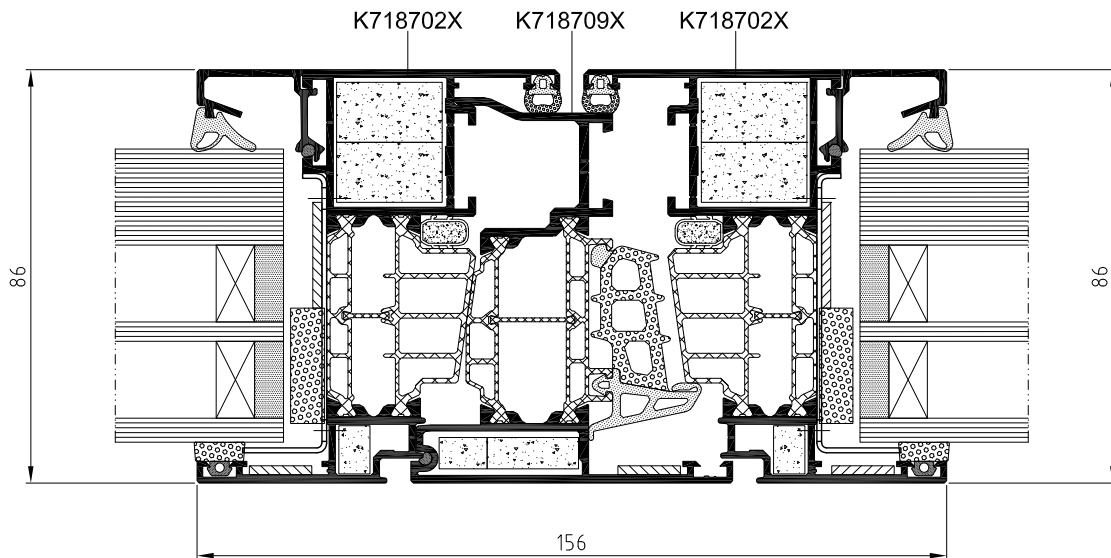


Door EI₁ – cross-section

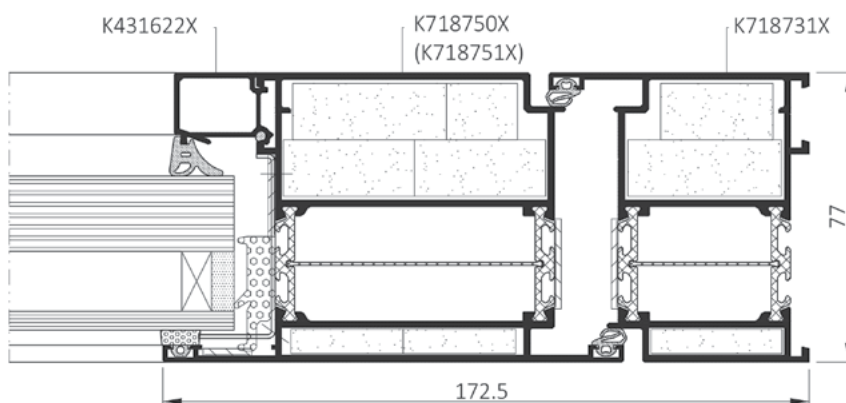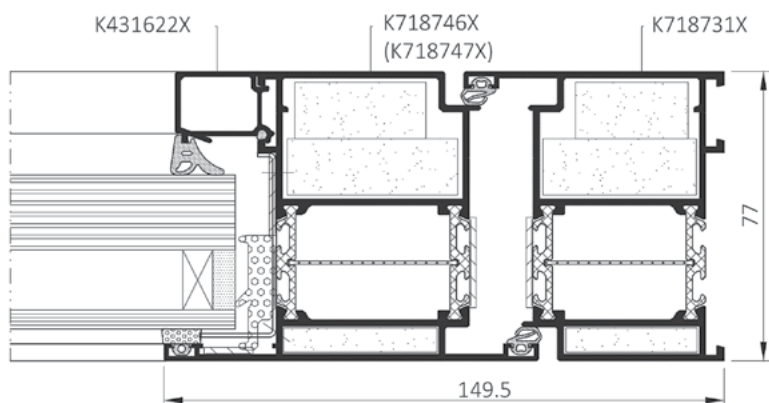

Door EI₂ – cross-section

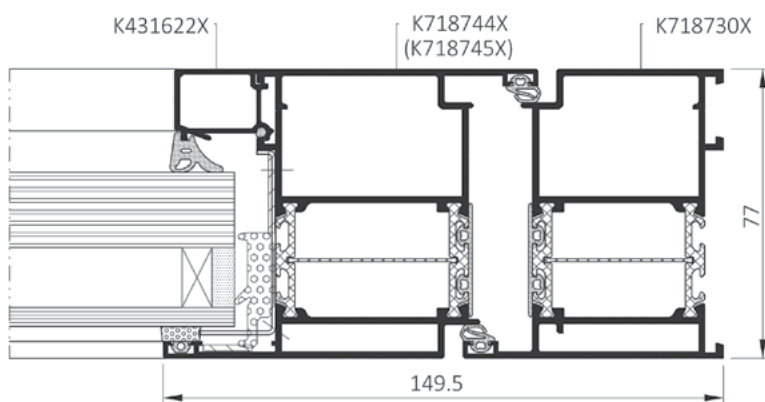

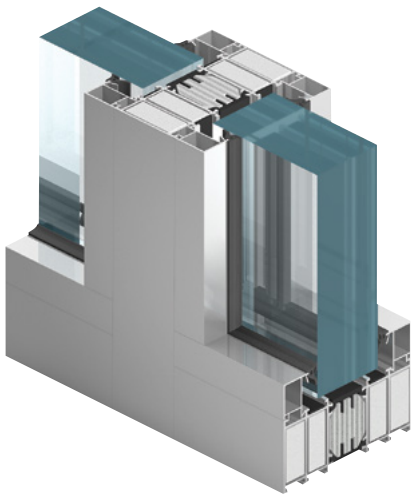

FIRE RATED PARTITION WALLS


MB-118EI

The MB-118 EI fire rated walls are used to make fire partitions with fire resistance class of EI 120. The system is classified as non-fire spreading (NRO). It's design & construction is such that, it provides a technical connection with the MB-78EI door, which means a number of common components (such as glazing beads, cooling inserts, expanding tapes, seals and most accessories) and also similar to the basic system, production and installation technology.


The MB-118EI system has been developed on the basis of a five chamber insulated aluminium profile, with a front to back depth of 118 mm. The inner chamber profiles, as well as insulating space between them, are filled with fire insulation elements. On the outer surfaces there are expanding tapes which are additionally mounted, and the whole structure is completed by steel accessories components, joining both sides of the profiles. The MB-118EI system can accommodate infills of a thickness 31-84 mm. This system can also be the basis for constructions in EI 30 or EI 60 classes, in which, due to high thermal or acoustic requirements, triple glazing units must be used.

Thanks to its symmetrical composition, the structures that are made of it remain fire resistant in EI 120 class, both exposed to fire from the outside and the inside. An important feature affecting the functionality of these fire partitions is the possibility to install the MB-78EI doors.


EI 120

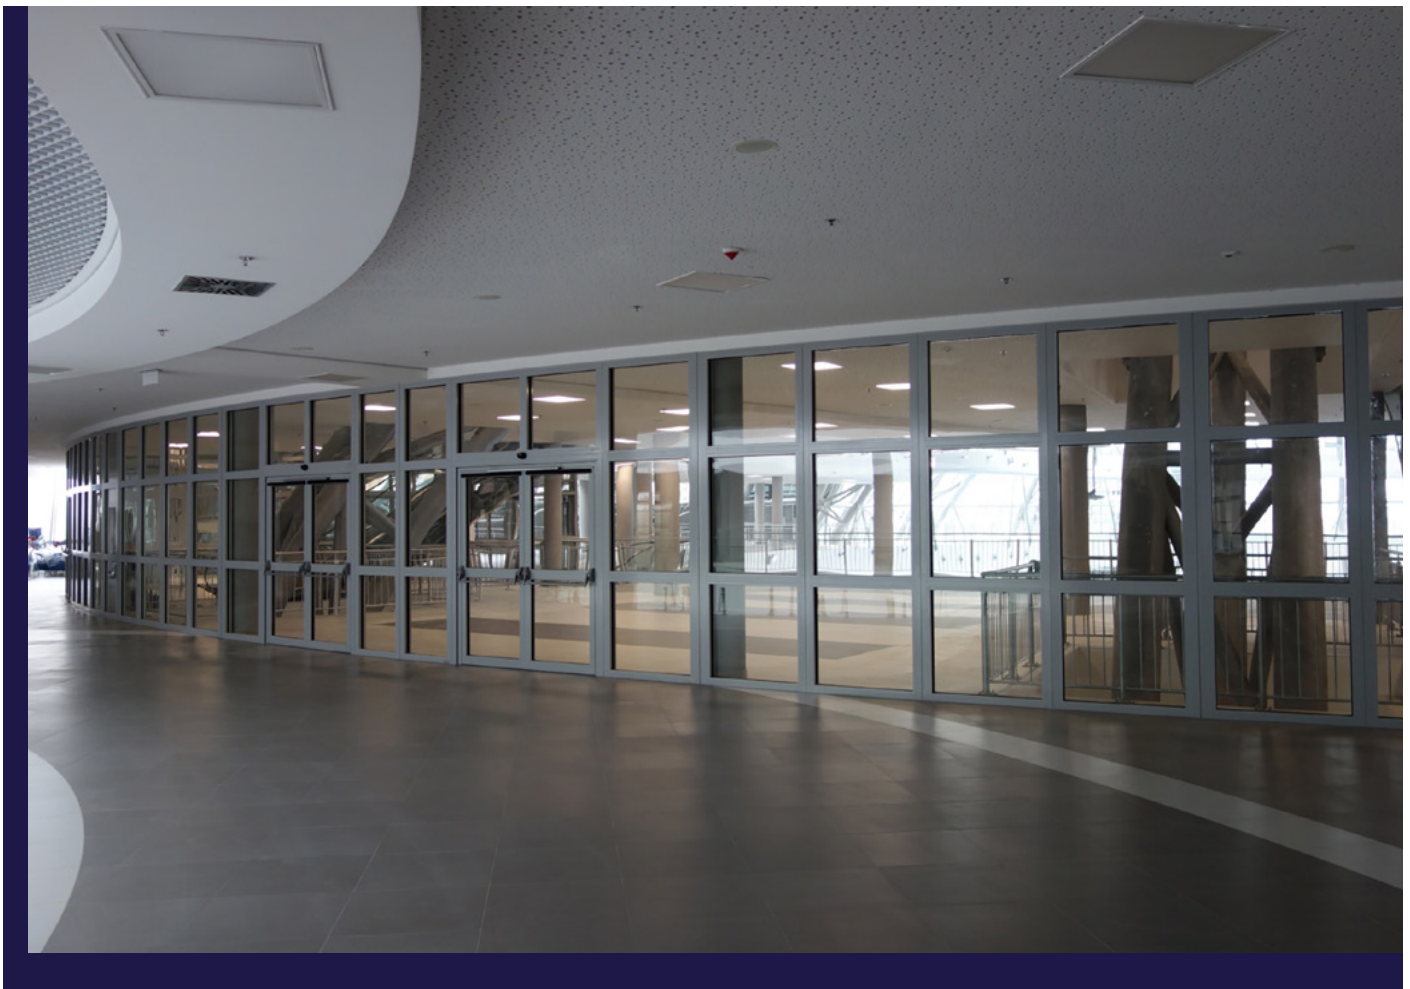

Max. dimensions of the walls

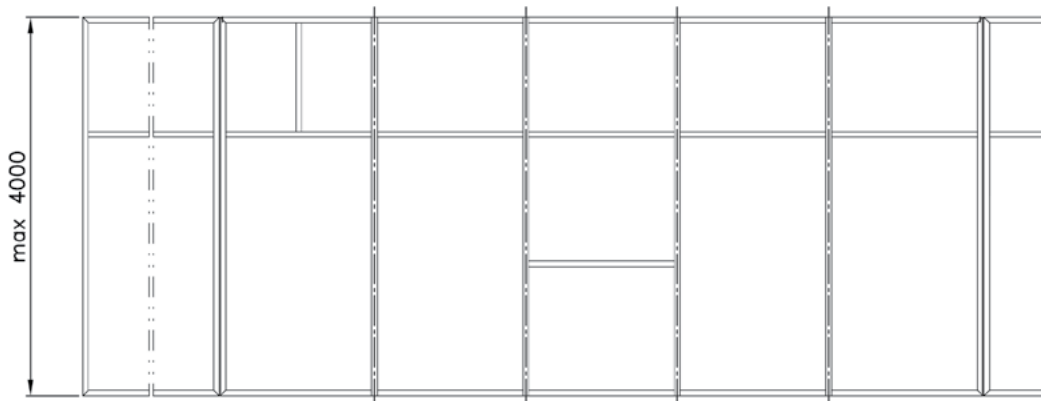

TECHNICAL SPECIFICATION		TECHNICAL PARAMETERS	
Depth of wall frame	118 mm	Fire resistance	Class EI 120, EN 13501-2
Glazing range	54 mm		

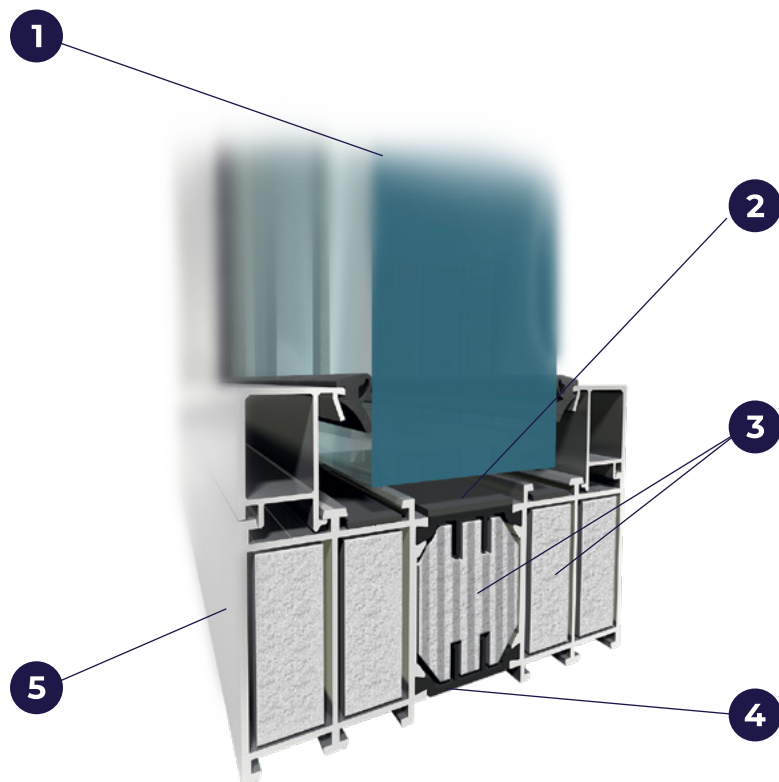

- 1 Single or double (sealed unit) fire resistant glasses, of a thickness to 84 mm.
- 2 Steel accessories and expanding tapes that protect the structure from high temperatures
- 3 GKF or CI type fire protection infills inside the profiles allowing to obtain EI120 class
- 4 Profiled thermal break that provides adequate protection against heat loss
- 5 5-chamber, symmetrical design, where fire resistance is maintained regardless the side of the fire

INSTYTUT TECHNIKI BUDOWLANEJ
PL 00-611 WARSZAWA
ul. Polowa 1
tel.: (+48 22) 825-04-71
fax: (+48 22) 825-16-68
www.itb.pl

Member of
EOTA
www.eota.eu

European Technical Assessment

ETA-20/0890
of 12/01/2021

General Part
Technical Assessment Body issuing the European Technical Assessment: Instytut Techniki Budowlanej

Trade name of the construction product: ALUPROF MB-118EI EI120

Product family to which the construction product belongs: Internal Partition Kit for use as non-load bearing walls

Manufacturer: ALUPROF S.A., ul. Warszawska 153, 43-300 Bielsko-Biala, Poland

Manufacturing plant: ALUPROF S.A., ul. Warszawska 153, 43-300 Bielsko-Biala, Poland

This European Technical Assessment contains: 23 pages including 3 Annexes which form an integral part of the Assessment

This European Technical Assessment is issued in accordance with regulation (EU) No 305/2011, on the basis of: European Assessment Document EAD 210005-00-0505 "Internal partition kits for use as non-loadbearing walls"

Instytut Techniki Budowlanej
Research and development works | Accredited Group of Laboratories |
Notified Body N° 1488 | EOTA member | Certified management systems ISO 9001, ISO 27001

CLASSIFICATION OF FIRE RESISTANCE
IN ACCORDANCE WITH EN 13501-2:2016

Order No.: 1036/19/R419NZP

Owner of this report: ALUPROF® S.A., ul. Warszawska 153, 43-300 Bielsko-Biala, Poland

Prepared by: Fire Research Department, Building Research Institute, 21, Kaszewow St., PL 02-656 Warsaw

Name of product: Aluminium framed partition of ALUPROF® MB-118EI system

Classification Report No.: 1036/19/R409NZP-ENG

Issue number: 1



Date of Issue: 2019.11.25


This classification report consists of 7 pages and may only be used or reproduced in its entirety.

The MB-118EI system holds an ITB's Classification No. 1036/19/ and European Technical Assessment No ETA-20/0890



Fire rated partition wall - cross-section

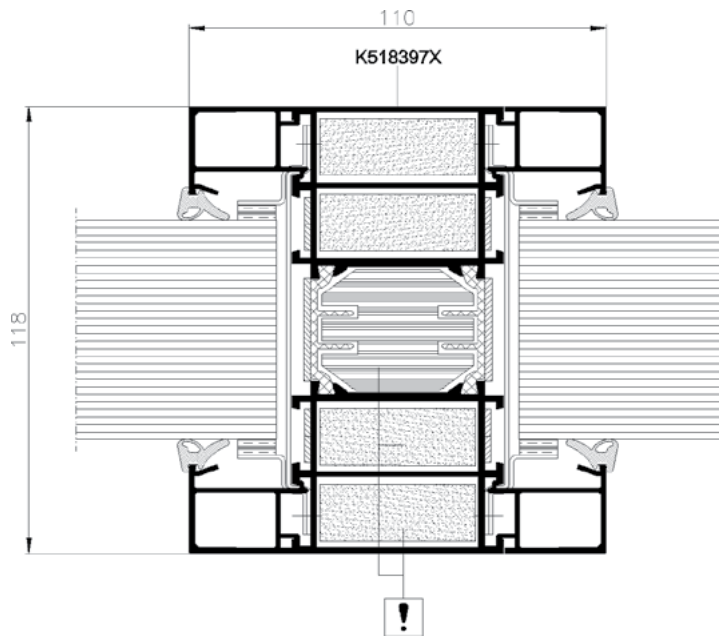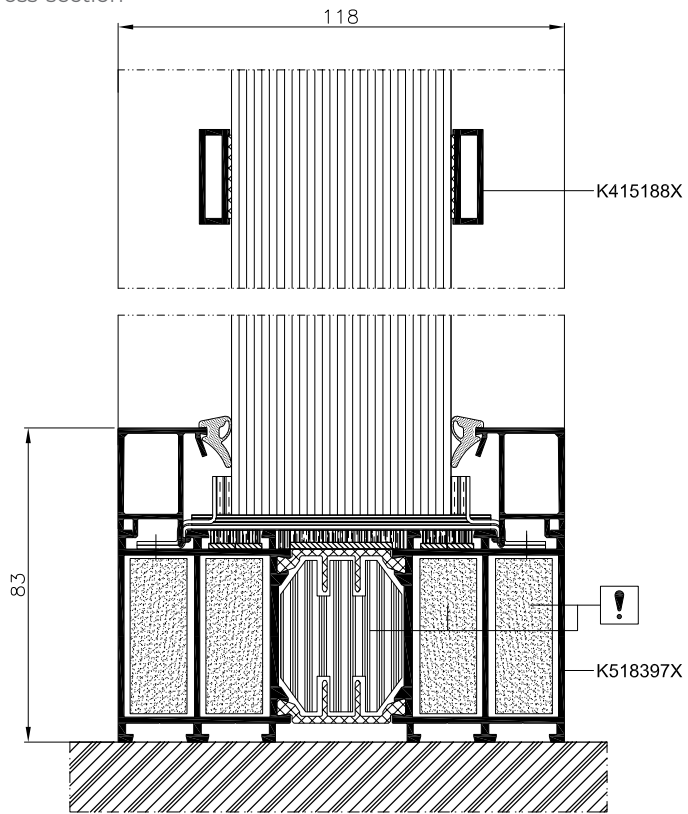

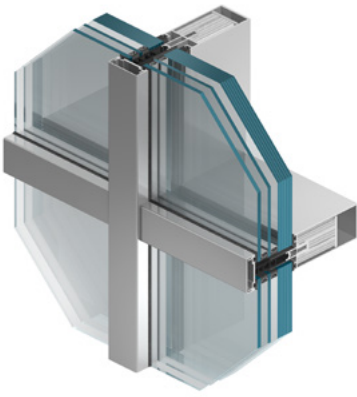

CURTAIN WALL FIRE RATED SYSTEM

MB-SR50N EI

The MB-SR50N EI curtain wall fire rated systems have been developed to provide a light-weight curtain & fire resistant wall, of classes EI30, EI60 classes according to PN-EN 1364-3 and PN-EN 1364-1 and of fire-resistant glass-covered roofs. The system is classified as non-fire spreading (NRO).


These solutions use profiles of the basic, MB-SR50N façade system: mullions of a depth of between 85 and 225 mm and transoms of a depth of 65 and 189,5 mm. The MB-SR50N system allows for selecting mullion & transom profiles which provide a flush internal finish of the facade, creating a desirable, unified grid appearance. The design of the fire rated curtain wall system allows the use of angled connections to $\pm 7.5^\circ$ per side, angled connections 90° or 135° (internal or external) and building façades tilted from the vertical at an angle of $\pm 15^\circ$. It is also possible to install the MB-78EI fire doors while maintaining the fire resistance of the whole structure in classes EI 30 or EI 60.

EI 30

EI 60




Max. dimensions of the panels in curtain walls



MHmax=3000 mm
MLmax=1500 mm

- 300 kg

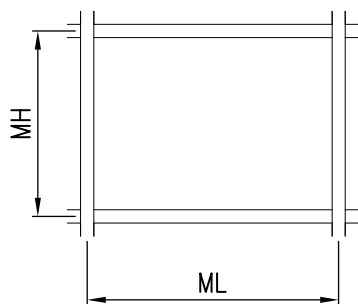


MHmax=1500 mm
MLmax=2400 mm

- 300 kg

} - max. infill weight

TECHNICAL SPECIFICATION	MB-SR50N EI
Mullions depth	85 – 225 mm
Transoms depth	69,5 – 189,5 mm
Inertia mullions (coeff. range I_x)	83,80 – 1222,14 cm ⁴
Inertia transoms (coeff. range I_y)	48,07 - 591,55 cm ⁴
Width of profiles	50 mm
Glazing range	16 – 64 mm
TECHNICAL PARAMETERS	
Air Permeability	Class AE 1050, PN-EN 12152
Watertightness	Class RE 1200, PN-EN 12154
Fire resistance	Class EI 30, EI 60 , EN 13501-2
Thermal insulation (coeff. U_f)	from 1,8 W/(m ² K)

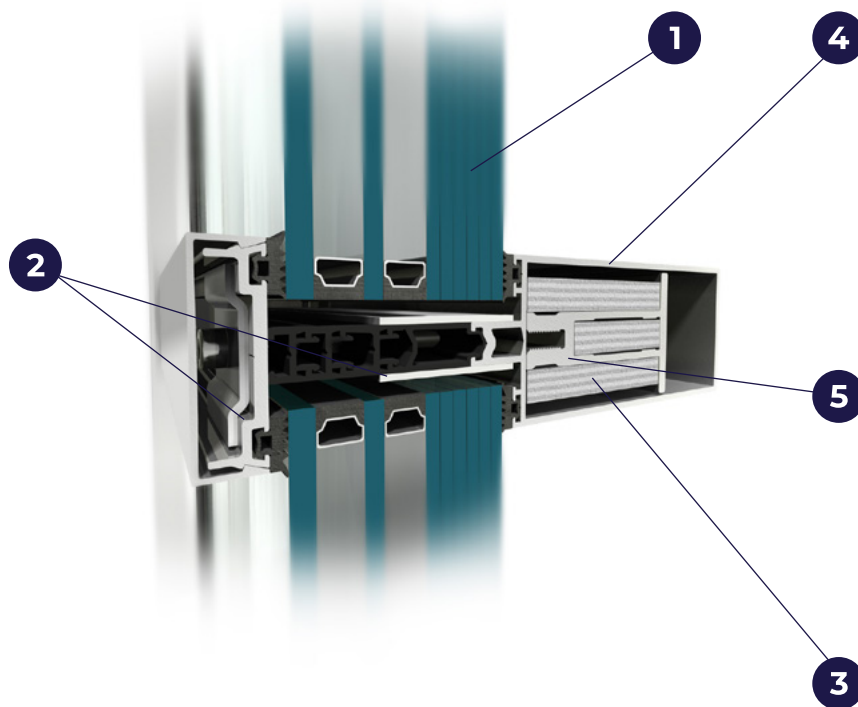

- 1 Single or double (sealed unit) fire resistant glasses, mechanical fix, glazed infill system, accommodating glass of a thickness up to 64 mm
- 2 Steel accessories, special bolts and expanding tapes that protect the structure from high temperatures
- 3 GKF or CI type fire protection inserted inside the profile, enabling performance classes of EI 30 – EI 60
- 4 Mullion and transom supporting structure gives the possibility to build vertical facades, inclined from the vertical position by an angle of $\pm 10^\circ$ and glazed roofs
- 5 The inner core aluminium profile insert, provides the necessary integrity of the construction in the event of a fire

The view of the fire resistant façade does not differ from the basic system. In order to gain fire resistance, mullions and transoms are fitted with special fireproof inserts. These inserts consist of an aluminium profile serving as a reinforcement element, clad round with fire-proof board. The glazing or other fire-proof fillings are “loaded” into their respective “zones,” against the internal glazing rebate of both the transoms & mullions, & held fast in place via an external pressure plate or clamping strip.

In order to achieve optimal heat and sound insulation in construction we use continuous thermal break profile of HPVC and EPDM seals. In addition, the side surfaces of the insulator are equipped with fire-proof tape that under high temperature expands and fills the space between the areas of the façade.

The pressure plate is fixed to the grid profiles by a machine screw and stainless steel plate. Such a method of fix provides the necessary technical parameter, in order to achieve performance, & protect against the glass or other similar fire resistant infill from unwanted displacement.

The MB-SR50N EI system holds an ITB's Classification No. 1036.12/16/R289N ZP and a certificate CERTIFIRE delivered by Warrington Certification Ltd No. CF 5139

ITB Instytut Techniki Budowlanej
Instytut Techniki Budowlanej
ul. Rydyńska 17, 01-644 Warszawa
tel. 22 629 42 00, 22 629 42 01, 22 629 42 02, 22 629 42 03, 22 629 42 04, 22 629 42 05, 22 629 42 06, 22 629 42 07, 22 629 42 08, 22 629 42 09, 22 629 42 10, 22 629 42 11, 22 629 42 12, 22 629 42 13, 22 629 42 14, 22 629 42 15, 22 629 42 16, 22 629 42 17, 22 629 42 18, 22 629 42 19, 22 629 42 20, 22 629 42 21, 22 629 42 22, 22 629 42 23, 22 629 42 24, 22 629 42 25, 22 629 42 26, 22 629 42 27, 22 629 42 28, 22 629 42 29, 22 629 42 30, 22 629 42 31, 22 629 42 32, 22 629 42 33, 22 629 42 34, 22 629 42 35, 22 629 42 36, 22 629 42 37, 22 629 42 38, 22 629 42 39, 22 629 42 40, 22 629 42 41, 22 629 42 42, 22 629 42 43, 22 629 42 44, 22 629 42 45, 22 629 42 46, 22 629 42 47, 22 629 42 48, 22 629 42 49, 22 629 42 50, 22 629 42 51, 22 629 42 52, 22 629 42 53, 22 629 42 54, 22 629 42 55, 22 629 42 56, 22 629 42 57, 22 629 42 58, 22 629 42 59, 22 629 42 60, 22 629 42 61, 22 629 42 62, 22 629 42 63, 22 629 42 64, 22 629 42 65, 22 629 42 66, 22 629 42 67, 22 629 42 68, 22 629 42 69, 22 629 42 70, 22 629 42 71, 22 629 42 72, 22 629 42 73, 22 629 42 74, 22 629 42 75, 22 629 42 76, 22 629 42 77, 22 629 42 78, 22 629 42 79, 22 629 42 80, 22 629 42 81, 22 629 42 82, 22 629 42 83, 22 629 42 84, 22 629 42 85, 22 629 42 86, 22 629 42 87, 22 629 42 88, 22 629 42 89, 22 629 42 90, 22 629 42 91, 22 629 42 92, 22 629 42 93, 22 629 42 94, 22 629 42 95, 22 629 42 96, 22 629 42 97, 22 629 42 98, 22 629 42 99, 22 629 42 00

Warszawa, dnia: 2017.04.05

ALUPROF S.A.
ul. Warszawska 153,
43-300 Bielsko-Biala

Praca nr 1036.12/16/R289N ZP

Klasyfikacja w zakresie odporności ogniowej ścian osłonowych w pełnej konfiguracji oraz ścian wypiętych systemów: MB-SR50 EI i MB-SR50N EI firmy ALUPROF S.A.
(zastępuje pracę nr 1036.8/16/R289N ZP)

1. Podstawy formalne

- 1.1. Zlecenie firmy Aluprof S.A.
- 1.2. Ankieta do umowy ramowej nr 01036/16/R289N ZP

2. PODSTAWY MERYTORYCZNE

- 2.1. **NORMY**
 - 2.1.1 Norma PN-EN 13651-2:2016-07 Klasyfikacja ogniowa wyrobów budowlanych i elementów budowlanych – Część 2: Klasyfikacja na podstawie badań odporności ogniowej, z wyłączeniem instalacji wentylacyjnej
 - 2.1.2 Norma PN-EN 13501-1+A1:2010 Klasyfikacja ogniowa wyrobów budowlanych i elementów budowlanych – Część 1: Klasyfikacja na podstawie wyników badań reakcji na ogień
 - 2.1.3 Norma PN-EN 1364-3:2014 Badania odporności ogniowej elementów niestanowiących Części 3: Ściany osłonowe. Pełna konfiguracja (kompletny zestaw).
 - 2.1.4 Norma PN-EN 1365-1:2001 Badania odporności ogniowej – Część 1: Wymagania ogólne.
 - 2.1.5 Norma PN-EN 1363-1:2012 Badania odporności ogniowej – Część 1: Wymagania ogólne.
- 2.2 Raporty z badań w zakresie odporności ogniowej ścian osłonowych typu E30
- 2.2.1 Raport ITB nr LP-1245.1/06 z badania odporności ogniowej ściany osłonowej jednopłaszczyznowej systemu MB-SR50 E30 w pełnej konfiguracji przy nagrzewaniu od zewnątrz (wg. krzywej standardowej). Wypełnienie szymbami zespolonymi o budowie: 5,4 Oplaminy ramka 12 mm/żaluzja Pyrostop gr. 15 mm firmy Pilkington o maksymalnych wymiarach: 1800 x 1200 mm oraz 1400 x 2400 mm.
- 2.2.2 Raport ITB nr LP-1245.2/06 z badania odporności ogniowej ściany osłonowej jednopłaszczyznowej systemu MB-SR50 E30 w pełnej konfiguracji przy nagrzewaniu od zewnątrz (wg. krzywej standardowej). Wypełnienie szymbami zespolonymi o budowie: 5,4 Oplaminy ramka 12 mm/żaluzja Pyrostop gr. 15 mm firmy Pilkington o maksymalnych wymiarach: 1800 x 1200 mm oraz 1400 x 2400 mm.

certifire

CERTIFICATE OF APPROVAL
No CF 5139

This is to certify that, in accordance with
1300 General Requirements for Certification of Fire Protection Products
The undersigned products of

ALUPROF S.A.

Ul. Warszawska 153, 43-300 Bielsko-Biala, Poland
Tel: +48 33 891 53 00

Have been assessed against the requirements of the Technical Schedule(s)
indicated below and are approved for use subject to the conditions
specified herein:

CERTIFIED PRODUCT	TECHNICAL SCHEDULE
Aluminium Curtain Walling Systems Type: MB [®] SR50 EI MB [®] SR50N EI MB [®] SR50N EI EFEKT for Glazed Curtain Walls, Screens and Roof Glazing including internal and external single and double leaf MS 78E1 fire rated doors and single and double leaf sliding automatic MB 78E1 DPA fire rated doors	TS25 Fire Resistant Glass, Glazing Systems and Materials


Signed and sealed for and on behalf of CERTIFIRE

Sir Ken Knight
Chairman - Management Council
Page 1 of 29


 Issued: 10th January 2014
Valid to: 14th January 2019

This certificate is the property of Warrington Certification Limited, part of Exone (UK) Ltd.
Approved after written request from Aluprof, Bielsko-Biala, PL, Registered in Poland, No. 147940


Mullion cross-section EI 30

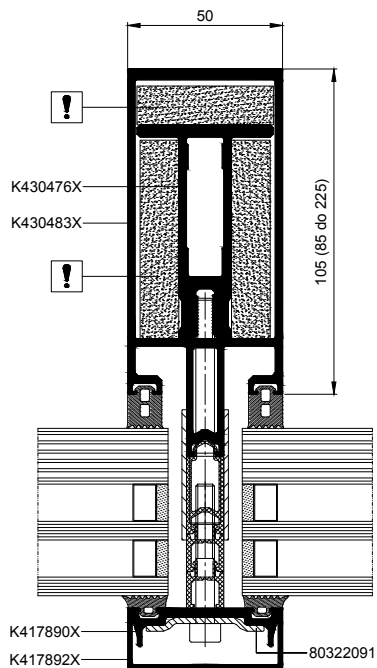


Mullion cross-section EI 60

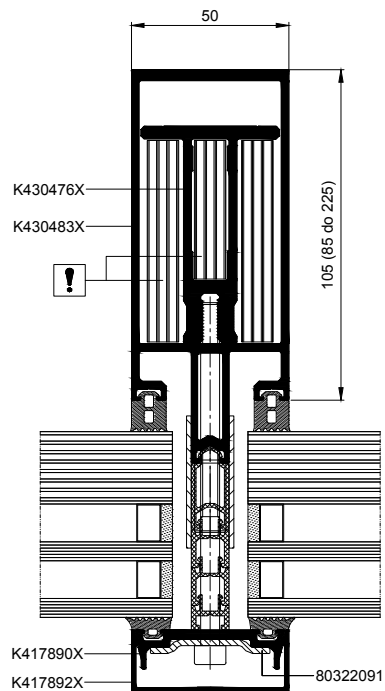


Mullion cross-section +7,5° EI 60

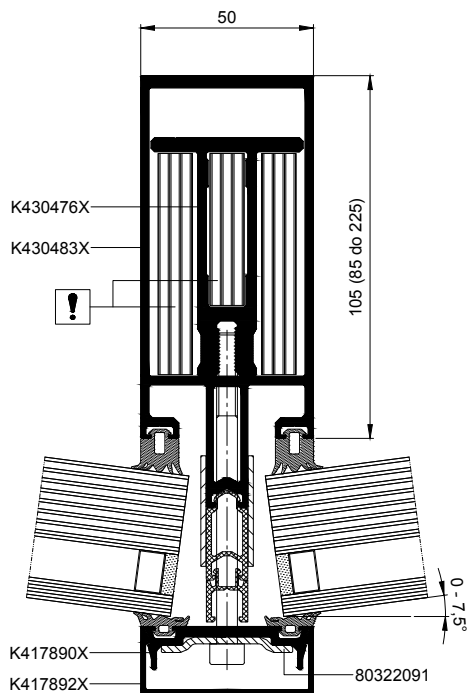

Mullion cross-section 90o EI 30

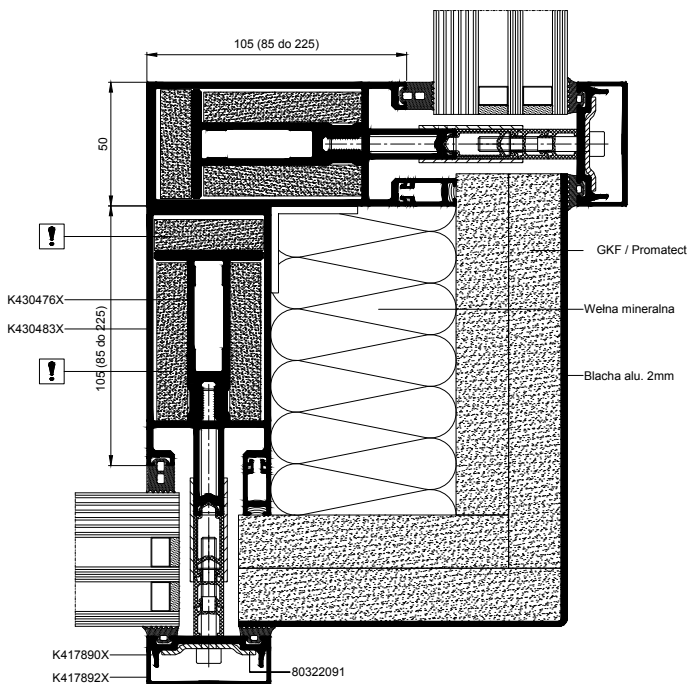

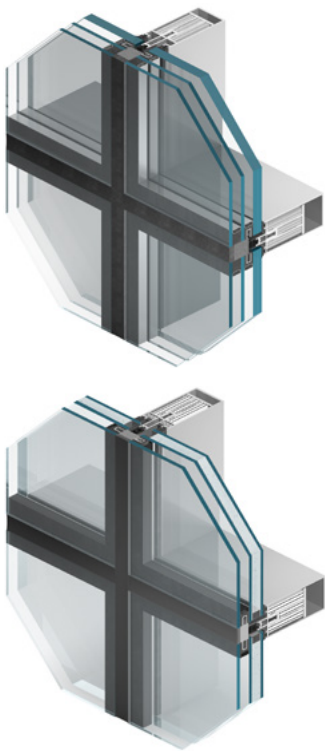

FAÇADE SYSTEM


MB-SR50N EI EFEKT

MB-SR50N EI EFEKT system is designed for fabrication of fire-rated, EI30, EI60 infill curtain profiles, the mullion and transom support structure has a special core protected by fireretardant inserts. It may be inclined from the vertical by an angle of $\pm 10^\circ$.


MB-SR50N EI EFEKT systems is covered by the ITB classification no 01036/15/R218NP and certified CERTIFIRE by the Warrington Certification Ltd (certificate no CF 5139).

EI 30


EI 60

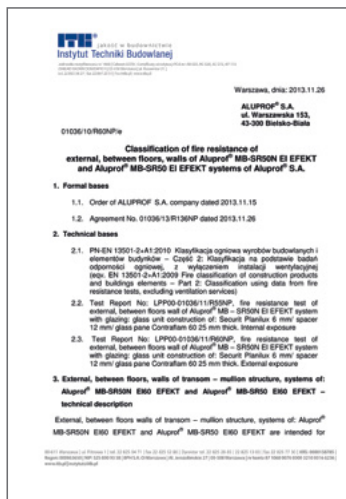


Transom EI30 cross-section

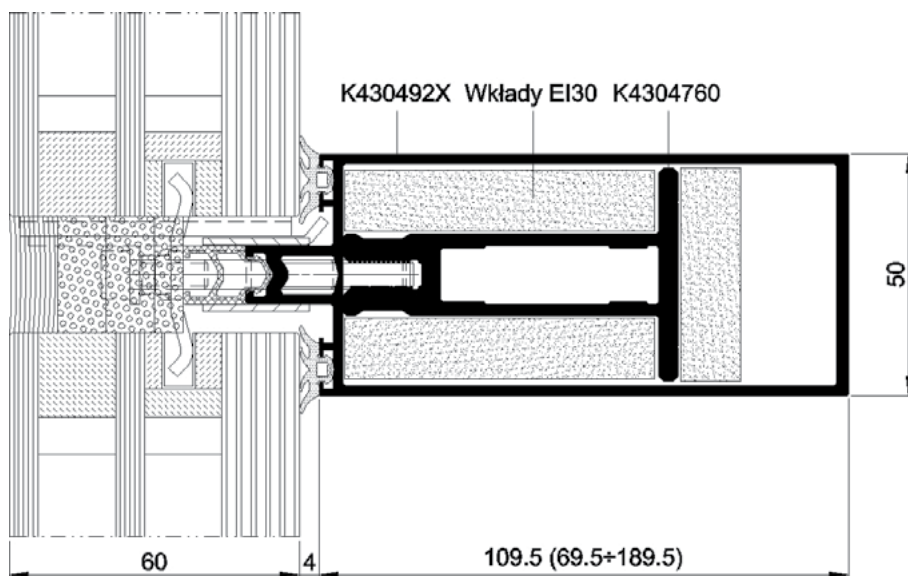

Transom EI60 cross-section

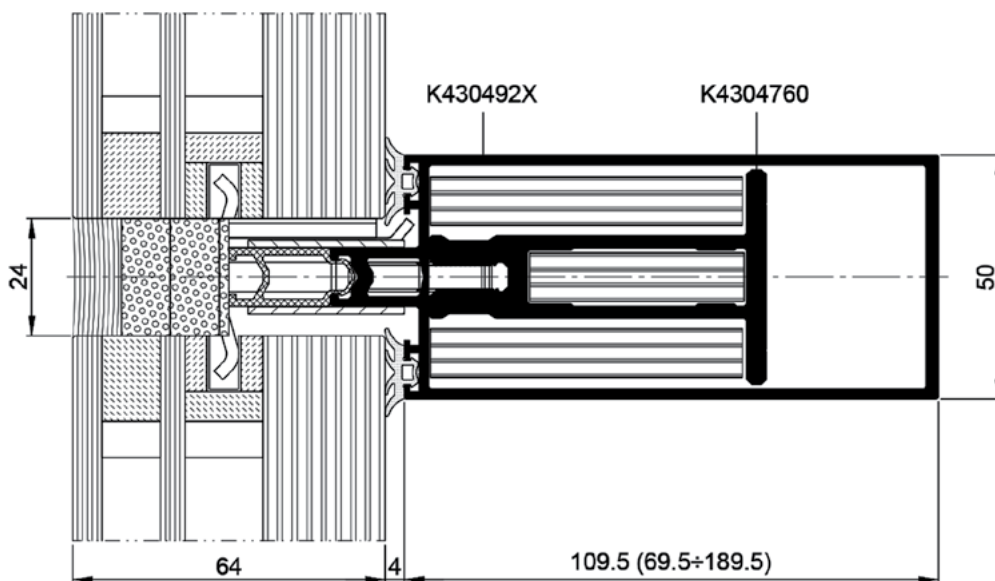

TECHNICAL SPECIFICATION	MB-SR50N EI EFEKT
Frame/mullion depth	85 – 225 mm
Leaf/transom depth	69,5 – 189,5 mm
Mullion stiffness (coeff. range Ix)	81,34 – 1222,14 cm ⁴
Transom stiffness (coeff. range Iz)	49,54 – 629,54 cm ⁴
Profiles width	50 mm
Glazing range	36 – 64 mm
TECHNICAL PARAMETERS	
Air permeability	class AE1200 Pa; PN-EN 12153:2004
Water-tightness	class RE1200; PN-EN 12155:2004
Wind resistance	2400 Pa / 3600 Pa; PN-EN 12179:2004
Impact resistance	class I5/E5; PN-EN 13049:2004, PN-EN 14019:2006

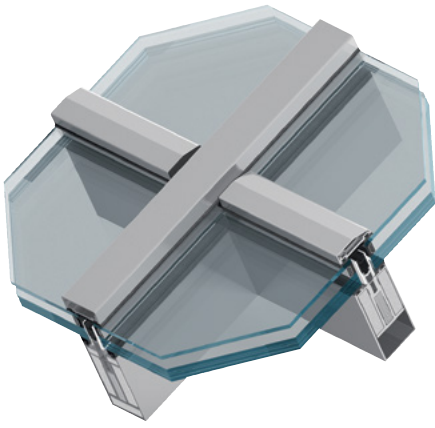

FIRE RESISTANT GLAZED ROOFS

Based on the MB-SR50N EI façade systems, it is possible to perform roof glazing with fire resistance class RE20, RE30, RE45, REI20, REI30 according to PN-EN 13501-2 + A1: 2010. "RE" means that the construction will maintain its structural capacity and integrity, and "REI" means that the construction will provide high temperature insulation.

Regular curtain wall mullions & transoms are used as roof glazing rafters & purlins, suitably joined to each other to form an aluminium grid structure, which is in turn mounted to the building structure by means of appropriate supports. Similar to the vertical curtain wall offer, these rafter & purlin profiles are fitted with fire resistant inserts, consisting of an aluminium insert profile acting as reinforcement, and surface clad with fire-proof board. The standard solution does not require any additional support such as steel.

Fire tests performed on two versions: flat and inclined, have assured classification of roofs with an inclination of 0° to 80° from the horizontal level. Rafters with a depth of 85 + 225 mm and purlins with a depth of 65 + 189.5 mm may be used in this structure. Window inserts are installed into the glazing rebate of the rafter & purlin formed grid, & fixed securely by the pressure plate clamping strip, screw fixed back to the carrier profiles. Within this system, it is possible to apply glazing thicknesses ranging from 32 to 64 mm. The maximum dimensions of the glass are 1250 mm x 3250 mm. Fire resistant glass can be used in a composite set with any glass placed in the system on the outside. Glazed fire resistant roofs can be combined with the EI MB-SR50N vertical façades.

REI 20 REI 30


RE 20 RE 30 RE 45




The MB-SR50N EI fire roofs hold an ITB's Fire Classifications Nos. 01036-18-R376N ZP & 01036.2-18-R376N ZP



Cross section of the fire roof ridge

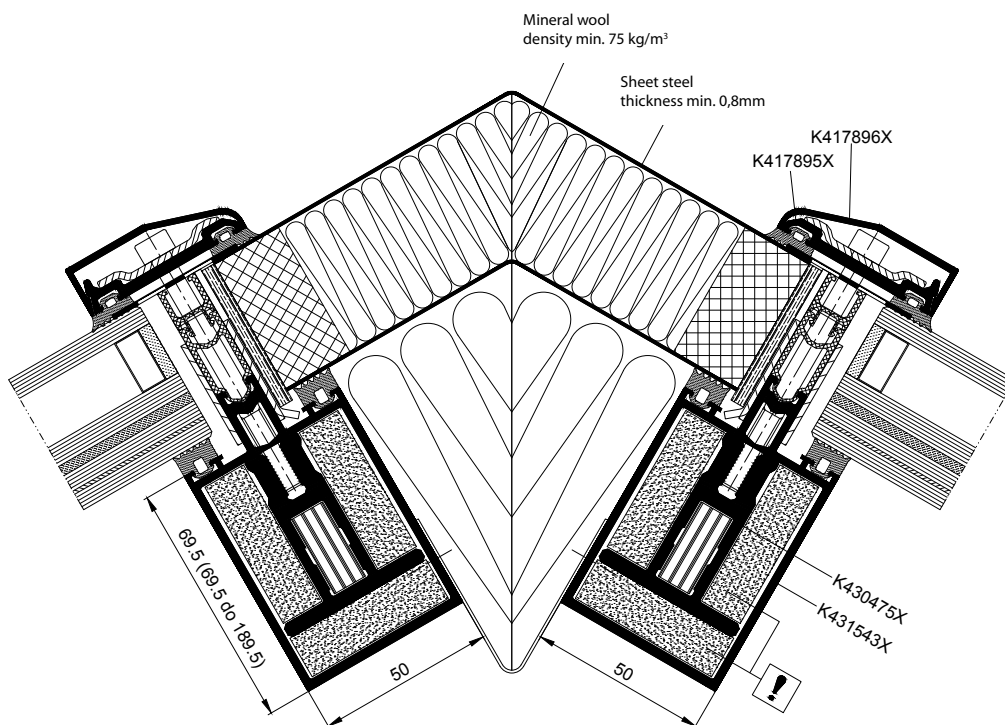

Cross section of the roof combined with a fire façade

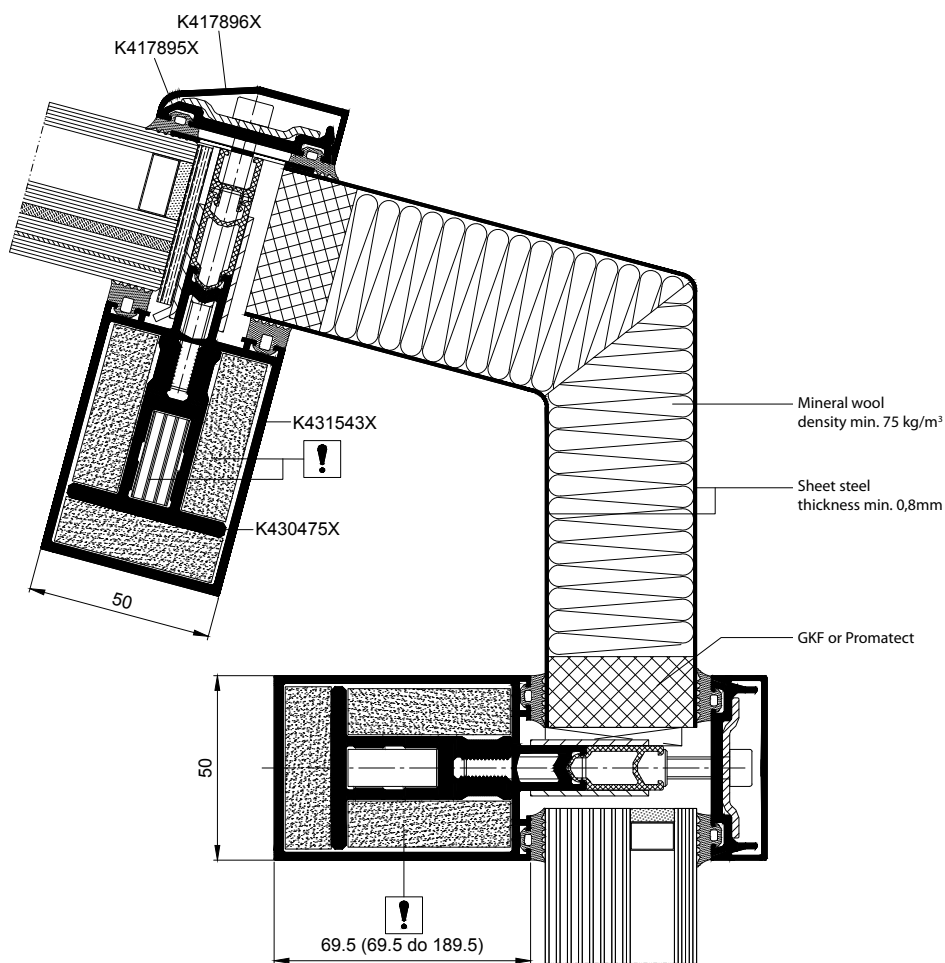



FIRE PARTITION WALLS AND DOOR

MB-45EW

The MB-45EW system enables the fabrication of fire-rated single and double doors and fixed partition walls with doors. The constructions based on the MB-45EW system are classified fire-resistant EW30 to EN 13501-2+A1:2010. The construction is based on aluminium profiles of the "non-thermal" system MB-45 which has a structural depth of 45 mm. The fire resistance of the construction is ensured by materials inserted into the internal chambers of the profiles. The outer surfaces have strips that swell under the effect of temperature.






The system can use fire-resistant glazing EW 30 (thickness 11 mm – 15,5 mm). The infill is made using standard glazing beads, and the entire construction has steel accessories that protect the glass in case of fire. The MB-45EW system enables the fabrication of doors with maximum leaf size of up to 2.40 m high and 1.25 m wide. Structural capabilities and compatibility with other MB-series systems make this solution very attractive in this product category, while providing an excellent fire protection.

EW 30




Efectis

Maximum size of the construction

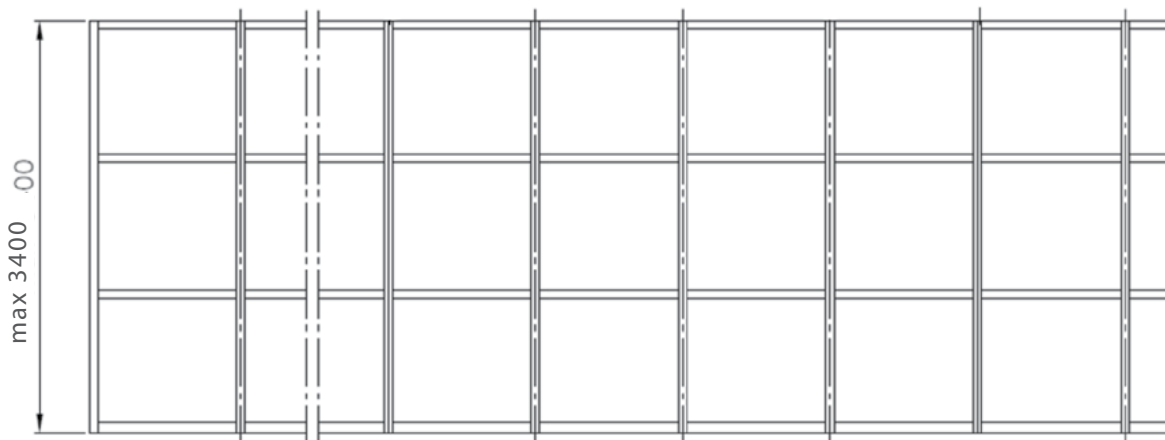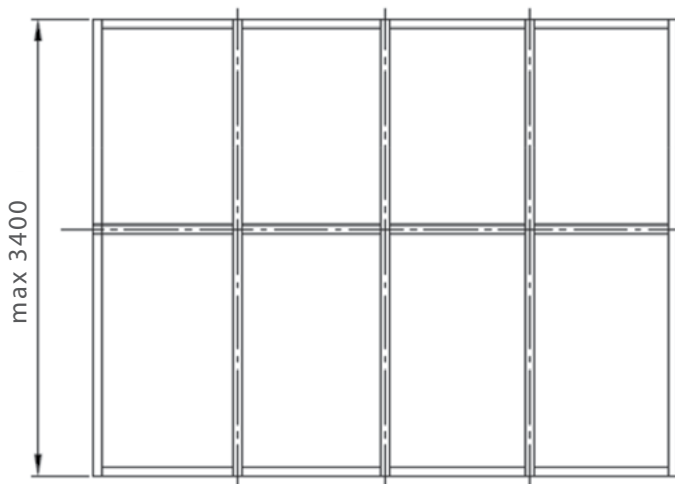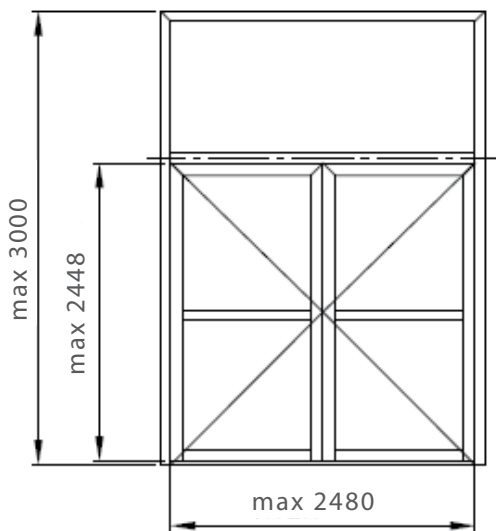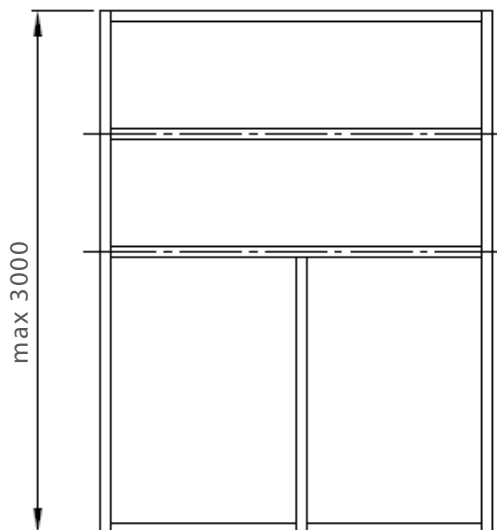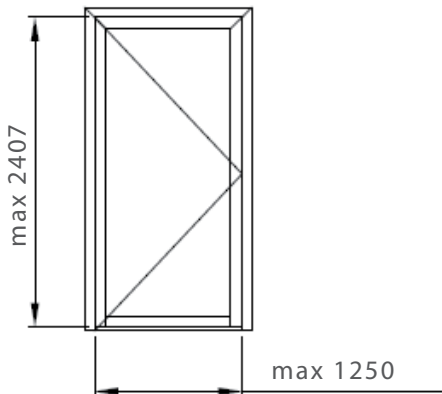


Technical parameters

Frame depth (wall & door)	45 mm	Range of glazing	11 - 15,5 mm
Door leaf depth	45 mm	Maximum weight of the door leaf	120 kg

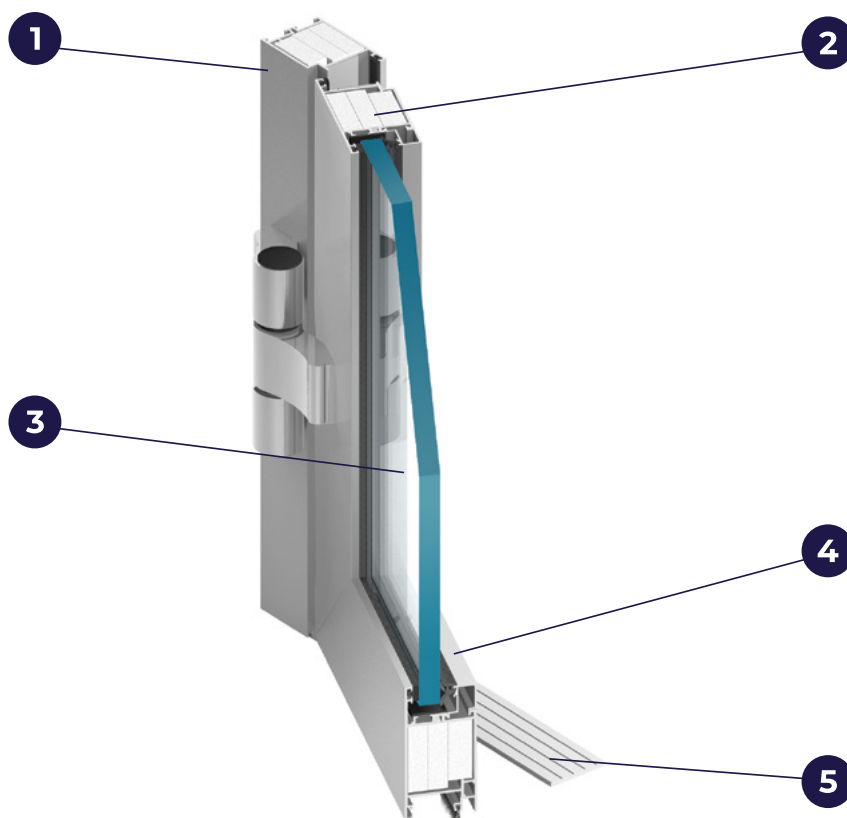


- 1 A solution based on MB-45 window & door profiles. Prefabrication made simple and fast with the use of elements that are common to both systems.
- 2 Special infills in the profiles and accessories for even better fire rating.
- 3 Possibility to use all standard types of fire resistant glass Pyroguard (EW30).
- 4 “From-the-inside” glazing – with glazing beads.
- 5 Low-level threshold solution

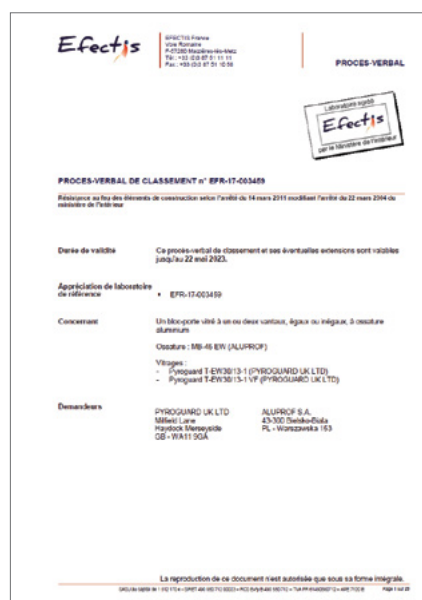


The door & partition wall system MB-45EW has documents issued by Efectis France: Classifications PV No EFR-17-003458 and EFR-17-003459

Fixed partition wall, section view


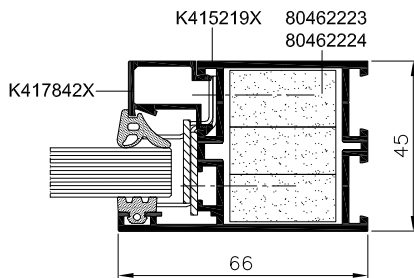


Door, section view

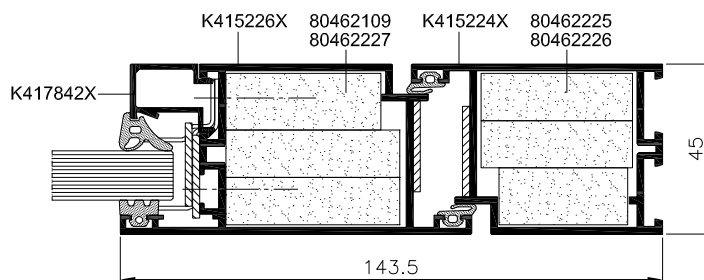

Door with low-level threshold, bottom view

Door with tubular threshold, bottom view

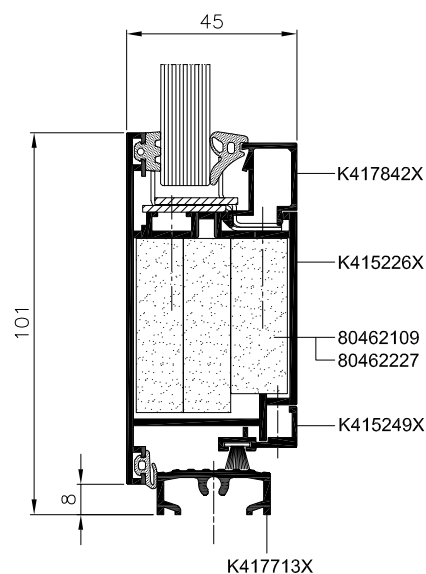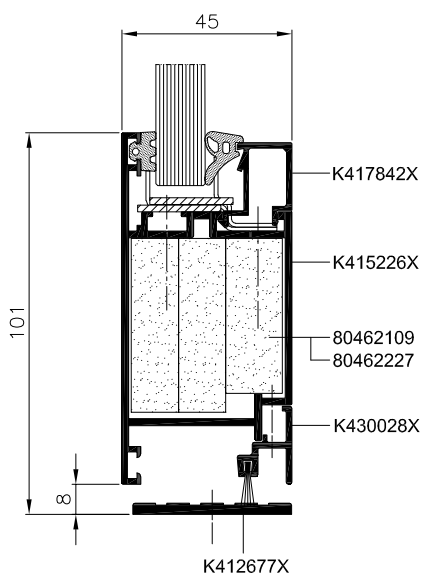

FIRE-RESISTANT GLASS

GLASSPROF EI


EI 30



EI 60



EI 90



GLASSPROF's EI-rated glass, which is manufactured by GLASSPROF sp. z o.o., a subsidiary of ALUPROF SA., is designed for use in building structures such as windows, doors, partitions, façades and similar. The company's product range includes not only EI30, EI60 and EI90 fire-rated glass, but also other types of glazing. The technology used at GLASSPROF enables us to produce insulating glass units featuring a range of glass functions, including fire resistance, thermal insulation, sun protection, sound reduction and security. Our EI glass is layered in structure, made with sheets of 5-mm-thick, clear, tempered glass to ensure user safety and reduce the risk of breakage during transport, installation and use. The panes are separated by a layer of special fire-resistant gel. The overall thickness of glass constructed in this way ranges from 15 mm for EI 30 glass to 35 mm for EI 90 glass.

The fire rating determines the quantity of tempered glass and layers of gel. The gel used in GLASSPROF panes is resistant to radiation. As a result, it crystallises in the event of fire, forming a layer that provides fire insulation and safety.

The fundamental advantages of GLASSPROF EI glazing are its high transparency, low weight and UV resistance.





Functions and aesthetics of GLASSPROF fire-resistant glass:

- it is neutral in colour and features a transparency level (Lt) as high as 87%
- the radiation resistance has been confirmed by independent testing
- it has been awarded a safety class 1B1 classification, the highest as per the EN 12600 standard
- a high level of sound reduction reduces noise by 93% and more
- it is lightweight, at 32.5 kilograms for our EI30 glass
- large-scale glazing is possible
- GLASSPROF's glass components are produced with tempered glass featuring automatically smoothed edges
- there is no need to use external laminated glass to protect the fire-resistant glass in insulating units from UV radiation
- no aluminium tape is needed on the edges of the glass for moisture protection
- the production technology is state-of-the-art and fully automated
- the glass is also available in the form of single- and double-glazing units featuring a range of glass functions




Fire proof



Tempered glass




Lightweight



Reduces noise



Impact resistant



Transmits light




Large dimensions



High temperature range


TECHNICAL DATA	GLASSPROF EI30	GLASSPROF EI60	GLASSPROF EI90
FIRE RESISTANCE (EN 13501-2)	EI 30	EI 60	EI 90
Thickness	15 mm	25 mm	35 mm
Composition	5/5/5	5/5/5/5/5	5/5/5/5/5/5/5
Weight	32,5 kg/m ²	52.5 kg/m ²	72,5 kg/m ²
Temperature range for transport, storage and use	-10 / +45°C		
Visible light transmittance (Lt; EN 410)	87 %	84 %	82 %
g-value (EN 410)	74 %	69 %	66 %
Ug value (EN 673)	5,0 W/m ² K	4,5 W/m ² K	4,0 W/m ² K
Sound reduction (Rw; C, CTR) (EN ISO 10140-2, EN 717-1)	39 (-1; -2) dB	43 (-2; -2) dB	45 (-2; -3) dB
Radiation resistance (EN 12543-4)	2000 h		
Humidity resistance testing (EN 12543-4)	2 weeks / 100% relative humidity		
Pendulum impact class (EN 12600)	1B1		
Hazardous substances	none		

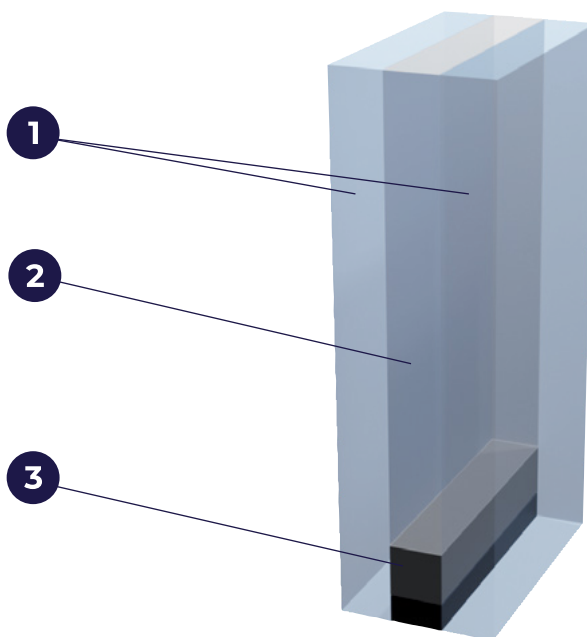

- 1 Tempered glass
- 2 Layer of fire-resistant gel
- 3 Sealing, with spacer bars



GLASSPROF's EI glass has been awarded a Constancy of Performance certificate by the Certbud notified body

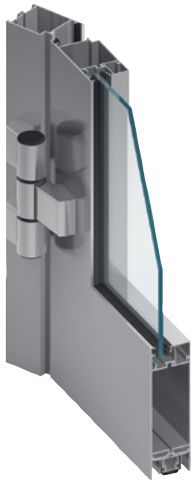

SMOKE-PROOF DOORS

MB-45

MB-45 partition system is intended for producing smoke exhaust single- or doubleleaf doors with a class of S_a and S_{200} according to the EN 13501-2:2016-07 standard. Proper performance of the smoke-tightness function is conditioned by the correct application of the leaf peripheral sealings, rear glazing and other fillings as well as the application of threshold seals.



Instytut Techniki Budowlanej

Research and development works | Accredited Group of Laboratories |
Notified Body N° 1488 (ICTA) member | Certified management systems ISO 9001, ISO 27001

CLASSIFICATION OF SMOKE CONTROL AND DURABILITY OF SELF-CLOSING IN ACCORDANCE WITH EN 13501-2:2016

Order No:	1036/21/R570NZP
Owner of this report:	ALUPROF® S.A. ul. Warszawska 153 43-300 Bielsko-Biala Poland
Prepared by:	Fire Research Department Building Research Institute 21, Kazimierz St. PL 02-656 Warsaw
Name of product:	Aluminium framed doors of ALUPROF® MB-45 system
Classification Report No.:	1036/21/R570NZP-ENG
Issue number:	1
Date of issue:	2021.10.28


This classification report consists of 42 pages and may only be used or reproduced in its entirety.

S_a / S_{200}


The MB-45 smoke-proof doors hold an ITB's Classification No. 1036/21/R570NZ




Door frame and door leaf – cross-section

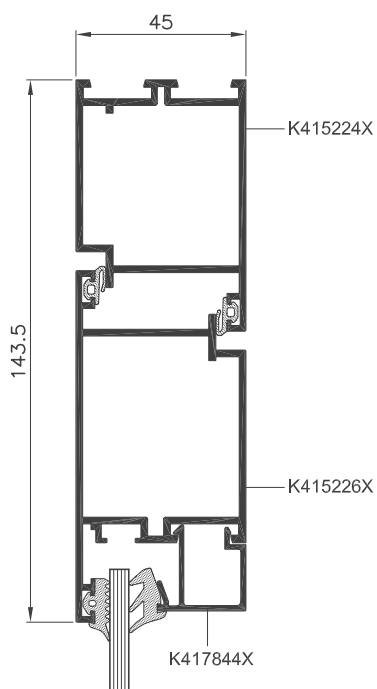

Door with threshold – bottom cross-section

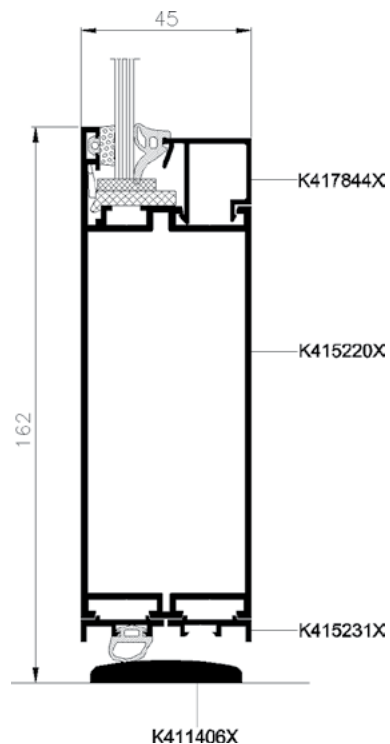

Door without threshold – bottom cross-section

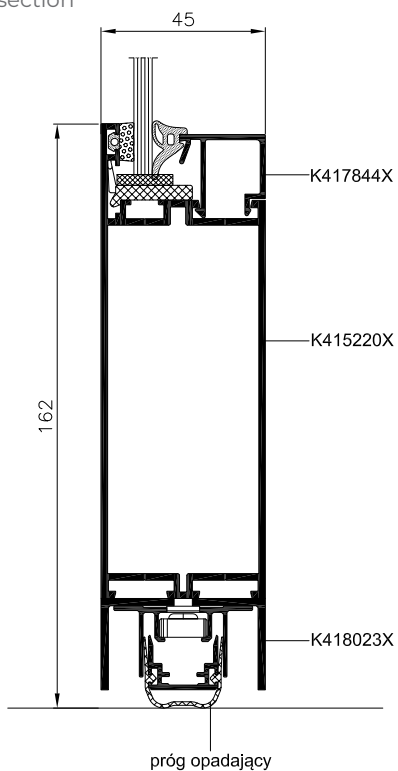

TECHNICAL SPECIFICATION			
Door frame depth	45 mm	Glazing range	2 - 25 mm
Door leaf depth	45 mm	Max. leaf door dimension	H up to 2400 mm (2200 mm), L up to 1250 mm (1400 mm)
		Max. leaf door weight	120 kg



SMOKE EXHAUST WINDOWS

Smoke exhaust windows play a particular role in ensuring safety and comfort for the people staying in the building. When properly selected, they are the elements of gravity ventilation, and when necessary they can help to quickly get rid of smoke & toxic vapours which can be hazardous to health or worse.

The offer for these products is characterised by the diversity of solutions so they can be used in an individual development, as well as elements integrated with aluminium façades or roof glazed panels.

Smoke exhaust structures can be based on window systems such as MB-59S, MB59S-Casement, MB-60, MB-60US, MB-70, MB-70US, MB-86, MB-86US, and on the dedicated solutions for façades, such as tilt windows (MB-SR50N OW) and skylights (MB-RW). There are various options of windows opening – side hinged or tilted inward or outward (top/bottom) as well as the dormers used with tilted façades or with skylights. Smoke exhaust and ventilation system is completed by the aerating windows or doors.


Maximum window size up to 4 m²



Cross-sections through the MB-RW smoke exhaust window in MB-TT50 system



Cross-section of the the MB-70 system's smoke exhaust window

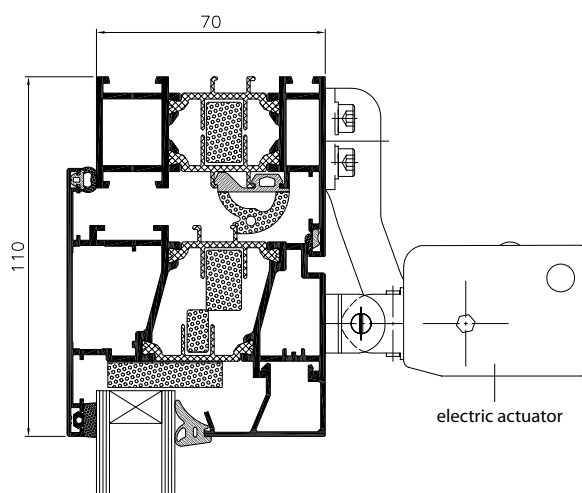

TECHNICAL SPECIFICATION	
Max. dimensions of window leaf (horizontal)	L up to 2500 mm, H up to 1600 mm
Max. dimensions of window leaf (vertical)	L up to 1600 mm, H up to 2500 mm
Max. dimensions of roof window leaf	L up to 1500 mm, H up to 2200 mm or L up to 2200 mm, H up to 1500 mm
Max. surface of vertical/roof smoke exhaust window	up to 4.0 m ² / up to 3.3 m ²
Max. opening angle of the smoke exhaust window	up to 90°

The smoke exhaust windows and flaps

The smoke exhaust windows and flaps can be equipped with reliable and silent mechanisms by D+H, GEZE, and for roof windows – also with drives by ESCO. Different types of actuators, including drives with a large opening force (up to 3,000 N) are available. They can be installed in a single window or in synchronised “Tandem” systems. In spite of their responsible function in building, these structures can be characterised by high aesthetics, which is ensured by the possibility of using small-sized drives installed parallel to the window surface.



Producers of drives for smoke exhaust windows



EN 12101-2 standard which is the legal basis for the operation of smoke exhaust windows, requires that the equipment used for smoke and heat evacuation would work reliably and correctly every time it is started, during the period of use. Smoke exhaust structures based on Aluprof systems have been tested in accordance with the above standard in the Institutes of IFT and VdS both in terms of effective ventilation area, operational reliability and proper behavior under various operating conditions: the wind load, snow load and also under the influence of low and high temperatures. Through the smoke exhaust window made using Aluprof's systems have appropriate documents confirming the required technical parameters.

REFERENCE PROJECTS

completed using fire protection
and smoke exhaust systems by ALUPROF

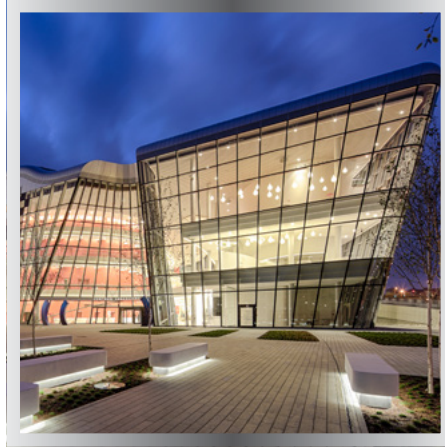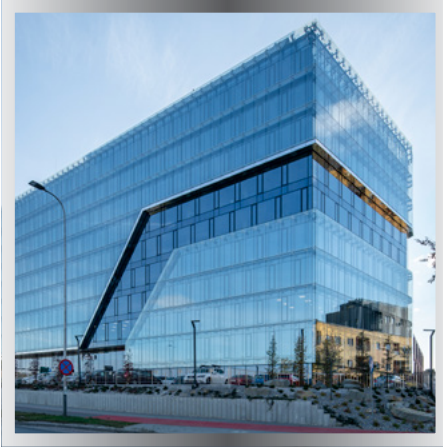

www.aluprof.com/en/manufacturers/projects

FIRE RATED AND SMOKE EXHAUST SYSTEMS
Edition 02-2023

Publisher ALUPROF S.A.
www.aluprof.com

Layout: Advertiva s.c.



Download the folder
to your device

ALUPROF

ALUMINIUM SYSTEMS

ALUPROF SA Plant in Bielsko-Biala, ul. Warszawska 153, 43-300 Bielsko-Biala, Poland,
tel. +48 33 81 95 300, fax +48 33 82 20 512, e-mail: aluprof@aluprof.eu

ALUPROF UK LTD, tel. +44 161 941 4005, e-mail: info@aluprof.co.uk

ALUPROF DEUTSCHLAND GMBH, tel. 0421 898189-20, e-mail: Kontakt@aluprof-deutschland.com

ALUPROF SYSTEMA UKRAINA OOO, tel. +380 444 944 784, e-mail: torg@aluprof.com.ua

ALUPROF HUNGARY KFT, tel. +36 27 542 600, e-mail: hungary@aluprof.eu

ALUPROF SYSTEM ROMANIA SRL, tel. + 40 374 004 594, e-mail: romania@aluprof.eu

ALUPROF SYSTEM CZECH SRO, tel. +420 595 136 633, e-mail: czech@aluprof.eu

ALUPROF NETHERLANDS B.V., tel. +31 (0) 681 140 029, e-mail: info@aluprof-nederland.nl

ALUPROF BELGIUM, tel. +32 52 25 81 10, e-mail: belgium@aluprof.eu

ALUPROF USA, LLC, tel. 1 212 687 0300, e-mail: info@aluprofusa.com